



HTML



HTML

4.0

HTML

HTML4.0

HTML4.0

HTML

HTML4.0

■ HTML

HTML

HyperText Mark-up Language

tag

HTML SGML HTML SGML HTML C++
Java HTMLHTML



HTML W3C HTML
HTML



·" <" >" <P>
·
· Hello
·
·" /" < /font>
·



HTML Source `Creation of Webpage` is my favourite.
Creation of Webpage is my favourite.

`` `` Creation of webpage

2

HTML Source

I love Creation of Webpage. `
`It's a wonderful place.

I love Creation of Webpage.
It's a wonderful place.

`
`
HTML

HTML

HTML4.0

<HTML>	●		HTML	
<HEAD>	●			
<TITLE>	●			
<BODY>	●			
<!---->	○			
<P>	○			
 	○			
<HR>	○			
<CENTER>	●			
<PRE>	●			
<DIV>	●			
<NOBR>	●			
<WBR>	●			
	●		Bold	
	●			
	●			
<I>	●			
<TT>	●		Courier	
<U>	●			
<H1>	●			
<H2>	●			

<H3>	●			
<H4>	●			
<H5>	●			
<H6>	●			
	●			
<BASEFONT>	○			
<BIG>	●			
<SMALL>	●			
<STRIKE>	●			
<CODE>	●		<TT>	
<KBD>	●			
<SAMP>	●		<TT>	
<VAR>	●			
<CITE>	●			
<BLOCKQUOTE>	●			
<DFN>	●			
<ADDRESS>	●			
<SUB>	●			
<SUP>	●			
	●			
	●			
	○			
<MENU>	●		type	
<DIR>	●		<menu>	
<DL>	●			
<DT>	○			
<DD>	○			
<TABLE>	●			
<CAPTION>	●			

<TR>	●			
<TD>	●			
<TH>	●		<TD>	
<FORM>	●			
<TEXTAREA>	●			
<INPUT>	○			
<SELECT>	●			
<OPTION>	○			
	○			
<A>	●			
<BASE>	○		URL	
<FRAMESET>	●			
<FRAME>	○			
<IFRAME>	○			IE
<NOFRAMES>	●			
<MAP>	●			
<AREA>	○			
<BGSOUND>	○			IE
<EMBED>	○			
<MARQUEE>	●			IE
<BLINK>	●			NC
<ISINDEX>	○			
<META>	○			
<LINK>	○		URL	
StyleSheet				
<STYLE>	●			



</>



- IE Internet

Explorer

- NC Netscape

Communicator

- W3C

I

- W3C

HTML

- HTML 4.0

HTML

HTML4.0



`<HTML><HEAD><TITLE><BODY>`

HTML

HTML

■ HTML

HTML Source Code HTML

```
<HTML>
<HEAD>

<TITLE> </TITLE>
</HEAD>
<BODY>

</BODY>
</HTML>
```

- `<HTML></HTML>`
`<HTML> HTML HTML`

- `<HEAD></HEAD>` `<BODY></BODY>`
 `<TITLE>`

-

- `<TITLE>`
 Bookmark

`<BODY>`

■ `<BODY>...</BODY>`

```
%conreattrs,%i18n,%events
background="..."URL
bgcolor="..."
text="..."
link="..."
vlink="..."
alink="..."
onload="..."
onunload="..."
```

BODYHEADBODYFRAMESET

```
<BODY text="#000000" link="#0000FF" alink="#FF0000" vlink="#0000FF"
background="bg1.gif" bgcolor="#FFFFFF" leftmargin=2 topmargin=2
bgproperties="fixed">
```

- `text="#000000"`

`#000000` text="

`black"`

- `link="#0000FF"`
- `alink="#FF0000"`
- `vlink="#0000FF"`
- `background="bg1.gif"`
GIF JPEG
- `bgcolor="#FFFFFF"`
- `leftmargin=2`
- `topmargin=2`
- `bgproperties="fixed"`

IE

IE

IE

onload Java Script

■ `<HTML>...<HTML/>`

`%i18n`
`version="..."URLHTML`

`<!DOCTYPE>`

■ <HEAD>...</HEAD>

%i18n

profile="..."URLMETA

HTMLBODY

■ <TITLE>...</TITLE>

WebHEAD

%i18n

HTML

HTML4.0



<!----> <P>
<HR><CENTER><PRE><DIV><NOBR><WBR>

HTML

HTML

■ <!---->

▲ Top

HTML



<!---->



<!-- 2000, FortuneAge -->

■ <P>

▲ Top

```
%coreattrs,%i18n,%events  
align="..."(left, right, center, justify)
```

<P>

<P> HTML 2.0 </P>

<P> <p align="center">

- align="center"
right, left, center
align=" left"

	<p>Here is the text for my paragraph. It doesn't matter how long it is, how many spaces are between the words or when I decide to hit the return key.</p> <p>It will create a new paragraph only when I begin the tag with another one.</p> <p><P>Here's the next paragraph.</p>
	<p>Here is the text for my paragraph. It doesn't matter how long it is, how many spaces are between the words or when I decide to hit the return key. It will create a new paragraph only when I begin the tag with another one.</p> <p>Here's the next paragraph.</p>

■

▲ Top

```
%coreattrs,%i18n,%events  
clear="..."(none, left, right, all)
```


	566 E Boston Post RD Mamaroneck NY 10543-9982 United States of America
	566 E Boston Post RD Mamaroneck NY 10543-9982 United States of America

	566 E Boston Post RD Mamaroneck NY 10543-9982 United States of America
	566 E Boston Post RD Mamaroneck NY 10543-9982 United States of America

■ <HR>

▲ Top

```
%coreattrs%events  
align="..."(left, right, center, justify)  
noshade="..."  
size="..."  
width="..."
```

<HR>

<HR>

<HR align="LEFT" size="2" width="70%" color="#0000FF" noshade>

- align="LEFT"
leftcenter

- size="2"
2

- width="70%"
100%

- color="#0000FF" IE

#0000FF

text="t

- noshade

	<pre><HR> <HR align="LEFT" size="4"> <HR align="LEFT" size="2" width="70%" color="#0000FF" noshade> <HR align="LEFT" size="4" width="70" color="#008000"></pre>

■ <CENTER>

▲ Top

<CENTER>

`align="CENTER" <CENTER>`
`<TABLE>` `<TABLE>`

	<code><CENTER>Chris's First Homepage</CENTER></code> <code><CENTER>What's new</CENTER></code> <code><CENTER>My profile</CENTER></code>
	Chris's First Homepage What's new My profile

■ `<PRE>`

[▲ Top](#)

```
%coreattrs,%i18n,%events  
WIDTH="..."
```

`<PRE>`

`<PRE>`

	<code><pre></code> Creation of Webpage Log Analysis I Composer Learning 459 407 480 522 547 586 673 HTML Advanced 200 268 296 358 385 453 506 <code></pre></code>
	Creation of Webpage Log Analysis I Composer Learning 459 407 480 522 547 586 673 HTML Advanced 200 268 296 358 385 453 506

■ <DIV>

▲ Top

<DIV>

<DIV> Style Sheet Class ;
Style Sheet

<DIV align="center">

- align="center"

center ; left ; right

<DIV align="center"> <CENTER>

HTML3.0

	<pre><DIV align="center">Chris's First Homepage
What's new
My profile</DIV></pre>
	Chris's First Homepage What's new My profile

■ <NOBR>

▲ Top

<NOBR>

Chris's Creation of Webpage

	If you want to know how to create you own homepage quickly, don't miss <NOBR>Chris's Creation of Webpage</NOBR> which will help you a lot.
	If you want to know how to create you own homepage quickly, don't miss Chris's Creation of Webpage which will help you a lot.

■ <WBR>

▲ Top

<WBR>

<WBR>

Please visit my other homepage which locate at
<http://www.geocities.com/SiliconValley/<WBR>Sector/8234/index.html>
There are many softwares for download. I think you will really love that
place.

Please visit my other homepage which locate at
<http://www.geocities.com/SiliconValley/Sector/8234/index.html> There
are many softwares for download. I think you will really love that place.

HTML

HTML4.0



<I> <VAR> <CITE> <DFN> <ADDRESS>

<TT> <SAMP> <CODE> <KBD> <U> <STRIKE> <BIG> <SMALL> <SUP> <SUB>

<H1> <H2> <H3> <H4> <H5> <H6>

 <BASEFONT>

HTML

HTML



[▲ Top](#)

1

2



<I> <U>



 <VAR> <CITE> <DFN> <ADDRESS> <CODE>
<KBO> <SAMP> <TT>

■

▲ Top

...

%coreattrs,%i18n,%events

Netscape Netvigator

HTML Source Code	
Creation of Webpage Creation of Webpage Creation of Webpage	Creation of Webpage Creation of Webpage Creation of Webpage

■ <I> <VAR> <CITE> <DFN> <ADDRESS>

▲ Top

<I>...</I>

%coreattrs,%i18n,%events

Internet Explorer </DFN> Netscape Netvigator
<ADDRESS>

HTML Source Code	
<I>Creation of Webpage</I>	

<pre>
Creation of Webpage
<VAR>Creation of Webpage</VAR>
<CITE>Creation of Webpage</CITE>
<DFN>Creation of Webpage</DFN> <ADDRESS>Creation of Webpage</ADDRESS> </pre>	<p><i>Creation of Webpage</i> <i>Creation of Webpage</i></p>
---	---

■ <TT> <SAMP> <CODE> <KBD> <U> <STRIKE> <BIG> <SMALL>
 <SUP> <SUB>

▲Top

- <TT> <SAMP> <CODE> <KBD>
- <U>
- <STRIKE>
- <BIG>
- <SMALL>
- <SUB> <SUP>

HTML Source Code	
<pre> Creation of Webpage
<TT>Creation of Webpage</TT>
<SAMP>Creation of Webpage</SAMP>
<CODE>Creation of Webpage</CODE>
<KBD>Creation of Webpage</KBD>
<U>Creation of Webpage</U>
<STRIKE>Creation of Webpage</STRIKE>
<BIG>Creation of Webpage</BIG>
<SMALL>Creation of Webpage</SMALL>
12345<SUB>7</SUB> 6789<SUP>9</SUP> </pre>	<p>Creation of Webpage Creation of Webpage <u>Creation of Webpage</u> Creation of Webpage Creation of Webpage Creation of Webpage 12345₇ 6789⁹</p>



■ <H1> <H2> <H3> <H4> <H5> <H6>

▲ Top

<H1> <H6>

	<p><H1>Header Level 1</H1> <H2>Header Level 2</H2> <H3>Header Level 3</H3> <H4>Header Level 4</H4> <H5>Header Level 5</H5> <H6>Header Level 6</H6></p>

Header Level 1

Header Level 2

Header Level 3

Header Level 4

Header Level 5

Header Level 6

■ ** <BASEFONT>**

[▲ Top](#)

```
<FONT>...</FONT>
```

```
size="..."(17)  
color="..."  
face="..."
```

- **<BASEFONT> <HEAD> </HEAD>**
 ** <BODY> </BODY>**
- ** <BASEFONT> **

Creation of Webpage

- face="Arial"
Arial Window Netscape
- size="+2"

<BASEFONT>

size="5" 5 html 3 size=" 3"

3 size="

3"

+2"

size="

n+2 3+2 <BASEFONT>

- color="#008000"

#008000

	<pre>I love Creation of Webpage
I love Creation of Webpage
I love Creation of Webpage</pre>
	<p>I love Creation of Webpage I love Creation of Webpage I love Creation of Webpage</p>

HTML

HTML4.0



<MENU> <DIR>
<DL> <DT> <DD>

HTML

HTML

■ :

▲ Top

```
<LI>...</LI>
```

```
%coreattrs,%i18n,%events  
type="..."(1,a,A,i,I)  
value="..."
```

```
<OL>...</OL>
```

```
%coreattrs,%i18n,%events  
type="..."(1,a,A,i,I)  
compact.  
start="..."
```


1,2,3...

<ol type="i" start="4">

- type="i"
type="
- start="4"
1,2,3..
start="1"

Type	Numbering style	
1	arabic numbers	1, 2, 3, ...
a	lower alpha	a, b, c, ...
A	upper alpha	A, B, C, ...
i	lower roman	i, ii, iii, ...
I	upper roman	I, II, III, ...

<li type="square" value="4">

- type="square"
type=" disc"
- type=" disc"
- type=" circle"
- type=" square"
- value="4"

HTML Source Code	
My best friends: Michelle Wei Michael Wan Gloria Lam	My best friends: 1. Michelle Wei 2. Michael Wan 3. Gloria Lam

■

▲ Top

```
%coreattrs,%i18n,%events  
type="..."  
compact.
```




<UL type="square">

- type="square"
type=" disc"
- type=" disc"
- type=" circle"
- type=" square"

 type

HTML Source Code	
<pre>My Homepages: Penpals Garden ICQ Garden Software City Creation of Webpage </pre>	<pre>My Homepages: • Penpals Garden • ICQ Garden • Software City • Creation of Webpage</pre>

■ <MENU> <DIR>

▲ Top

```
<MENU>...</MENU>
```

```
%coreattrs,%i18n,%events  
compact.
```

```
UL()UL
```

```
<DIR>...</DIR>
```

```
%coreattrs,%i18n,%events  
compact.
```

```
UL()UL
```

```
W3C <ul> <ol>  
<MENU> <DIR> <ul> <ol>  
<ul>
```

HTML Source Code	
<pre>My Homepages: <dir> Penpals Garden ICQ Garden Software City Creation of Webpage </dir></pre>	<pre>My Homepages: • Penpals Garden • ICQ Garden • Software City • Creation of Webpage</pre>

■ <DL> <DT> <DD> :

▲ Top

```
<DL>...</DL>
```

```
%coreattrs,%i18n,%events  
compact.
```

```
<DT><DD>
```

```
<DT>...</DT>
```

```
DL()
```

```
%coreattrs,%i18n,%events
```

```
()
```

```
<DD>...</DD>
```

```
DL()
```

```
%coreattrs,%i18n,%events
```

```
(block-level)<P>
```

```
<DL> <DT> <DD>
```

```
<DT> <DD> IE 3.0
```

<dl>

<dt>How to use Definition List

<dd>First, you should not place paragraph tag right after or before a list structure or between the items of a list. In cerntain contexts,

use of extra paragraph tags should always be avoided, when you realize this concept, it is quit easy to write a HTML.

`<dt>`Other things to know

`<dd>`We usually put only ONE Definition tag following the Definition Term tag, more than one DD tag is not recomanded. Besides, unlike Definition List is a nonempty tag, both Definition Term and Definition Description are empty tags.

`</dl>`

How to use Definition List

First, you should not place paragraph tag right after or before a list structure or between the items of a list. In cerntain contexts, use of extra paragraph tags should always be avoided, when you realize this concept, it is quit easy to write a HTML.

Other things to know

We usually put only ONE Definition tag following the Definition Term tag, more than one DD tag is not recomanded. Besides, unlike Definition List is a nonempty tag, both Definition Term and Definition Description are empty tags.

HTML

HTML4.0



<TABLE> <TR> <TD>
<TH>
<CAPTION>

HTML

HTML

■ <TABLE> <TR> <TD>

[▲ Top](#)

```
<TABLE>...</TABLE>
```

%coreattrs,%i18n,%events

align="..."(left,center,right,justify)

bgcolor="..."

width="..."

cols="..."

border="..."

frame="..."(void, above, below, hside, lhs, rhs,vsides,box,
border)

rules="..."(none, group, rows, cols, all)

cellspacing="..."

cellpadding="..."

<TR>...</TR>

%coreattrs,%i18n,%events
align="..."(left,center,right,justify)
char="..."
charoff="..."
valign="..."(top,middle,bottom,baseline)

<TD>...</TD>

%coreattrs,%i18n,%events
axis="..."
axes="..."
nowarp="..."
bgcolor="..."
rowspan="..."
colspan="..."
align="..."(left,center,right,justify)
char="..."
charoff="..."
valign="..."(top,middle,bottom,baseline)

<TABLE>

<TR> row
<TD> cell

<TABLE>

<table width="400" border="1" cellspacing="2" cellpadding="2"

`align="CENTER" valign="TOP" background="myweb.gif" bgcolor="#0000FF" bordercolor="#CF0000" bordercolorlight="#00FF00" bordercolordark="#00FFFF" cols="2">`

- `width="400"`
80 80%
- `border="1"`
- `cellspacing="2"`
5
- `cellpadding="2"`
10
- `align="CENTER"`
left, right, center <CENTER><CENTE
- `valign="TOP"`.
top, middle, bottom
- `background="myweb.gif"`
bgcolor
- `bgcolor="#0000FF"`
background
- `bordercolor="#CF0000"`
NC IE
- `bordercolorlight="#00FF00"`
IE
- `bordercolordark="#00FFFF"`
bordercolorlight bordercolordark bordercolor

- `cols="2"`

`<TR>`

```
<tr align="RIGHT" valign="MIDDLE" bgcolor="#0000FF"
bordercolor="#CF0000" bordercolorlight="#808080"
bordercolordark="#FF0000">
```

- `align="RIGHT"`

left, center, right

- `valign="MIDDLE"`

top, middle, bottom

- `bgcolor="#0000FF"`

- `bordercolor="#CF0000"`

IE

- `bordercolorlight="#808080"`

IE

- `bordercolordark="#FF0000"`

bordercolorlight bordercolordark bordercolor

IE

`<TD>`

```
<td width="48%" height="400" colspan="5" rowspan="4"
align="RIGHT" valign="BOTTOM" bgcolor="#CF0000"
bordercolor="#808080" bordercolorlight="#FF0000"
bordercolordark="#00FF00" background="myweb.gif">
```

- `width="48%"`

80 80%

- `height="400"`
- `colspan="5"`
- `rowspan="4"`
- `align="RIGHT"`
left, center, right
- `valign="BOTTOM"`
top, middle, bottom
- `bgcolor="#CF0000"`
- `bordercolor="#808080"`
IE
- `bordercolorlight="#FF0000"`
IE
- `bordercolordark="#00FF00"`
bordercolorlight bordercolordark bordercolor
IE
- `background="myweb.gif"`
bgcolor

	<pre style="color: green;"><table width="60%" border="1"> <tr><td>cell </td></tr> </table></pre>

cell

```
<table width="60%" border="5" bordercolorlight="#CF0000"
bordercolordark="#FF0000">
<tr><td></td><td></td></tr>
</table>
```

--	--


```
<table width="60%" border="1" cellspacing="5">
<tr bordercolor="#0000FF">
<td></td>
<td></td>
</tr>
<tr bordercolorlight="#CF0000"
bordercolordark="#00FF00">
<td></td>
<td></td>
</tr>
</table>
```


```
<table width="60%" border="1" cellpadding="10">
```

```

<tr>
  <td bgcolor="#FFCCE6"></td>
  <td bgcolor="#FFFFC6"></td>
</tr>
<tr>
  <td bgcolor="#FFD9FF"></td>
  <td bgcolor="#DAB4B4"></td>
</tr>
</table>

```



```


<center>
<table width="60%" cellspacing="0" cellpadding="2"
  align="CENTER">
  <tr>
    <td bgcolor="#FFD2E9"></td>
    <td bgcolor="#FFDAB5"></td>
    <td bgcolor="#FFFFB5"></td>
  </tr>
  <tr bgcolor="#C0C0C0">
    <td></td>
    <td></td>
    <td></td>
  </tr>
</table>
</center>

```





```
<center>
<table width="350" border="1" cellspacing="0"
cellpadding="2" align="CENTER" bgcolor="#FFC4E1"
bordercolor="#0000FF">
  <tr>
    <td></td>
    <td colspan="2"> </td>
  </tr>
  <tr>
    <td rowspan="2"> </td>
    <td></td>
    <td></td>
  </tr>
  <tr>
    <td></td>
    <td></td>
  </tr>
  <tr>
    <td></td>
    <td></td>
  </tr>
</table>
</center>
```



```
%coreattrs,%i18n,%events
axis="..."
axes="..."
nowrap="..."
bgcolor="..."
rowspan="..."
colspan="..."
align="..."(left,center,right,justify)
char="..."
charoff="..."
valign="..."(top,middle,bottom,baseline)
```

```
<TH><TD><TH><TD><TD>
```

```
<TD>
```

```
<center>
<table width="350" border="1" cellspacing="0"
  cellpadding="2" align="CENTER">
  <tr align="CENTER">
    <th>Month</th><th>% of IE visitor</th><th>% of NC
      visitor</th>
    </tr>
    <tr align="CENTER">
      <td>August</td><td>61%</td><td>39%</td>
    </tr>
    <tr align="CENTER">
      <td>July</td><td>54%</td><td>46%</td>
    </tr>
    <tr align="CENTER">
      <td>June</td><td>52%</td><td>48%</td>
    </tr>
```

Month	% of IE visitor	% of NC visitor
August	61%	39%
July	54%	46%
June	52%	48%

`</table>`
`</center>`

Month	% of IE visitor	% of NC visitor
August	61%	39%
July	54%	46%
June	52%	48%

■ `<CAPTION>`

[▲ Top](#)

`%coreattrs,%i18n,%events`
`align="..."(left,center,right,justify)`

`<CAPTION>`

`<CAPTION>`

`<caption align="TOP" valign="TOP"></caption>`

- `align="TOP"`

`left, center, right, top, middle, bottom align=" bottom"`
`<caption>` `<table>`

- `valign="TOP"`

`top, bottom align="TOP" align="BOTTOM"`
`align valign HTML 3.0`

`<center>`

```
<table width="350" border="1" cellspacing="0"
cellpadding="2" align="CENTER">
  <caption> </caption>
  <tr align="CENTER">
    <th>Month</th>
    <th>% of IE visitor</th>
    <th>% of NC visitor</th>
  </tr>
  <tr align="CENTER">
    <td>August</td>
    <td>61%</td>
    <td>39%</td>
  </tr>
</table>
</center>
```

Month	% of IE visitor	% of NC visitor
August	61%	39%

HTML

HTML4.0



HTML

HTML

■

```
%coreattrs,%i18n,%events
src="..."URL
alt="..."
align="..."(left, right, center, justify)
width="..."
height="..."
border="..."
hspace="..."
vspace="..."
usemap="..."URL
ismap
```

 Image


```

```

- **src**="logo.gif"
.gif, .jpg .png 96
- **width**=100 **height**=100
pixels
- **hspace**=5 **vspace**=5
hspace pixels
- **border**=2
- **align**="top"
top, middle, bottom, left,
Netscape texttop, baseline, absmiddle, absbottom
texttop
baseline
absmiddle
absbottom y gq
- **alt**="Logo of PenPal Garden"
- **lowsrc**="pre_logo.gif"



```
alt="beautiful" hspace=10 vspace=20">
```



```

```



4

```

```



```

```



HTML4.0

HTML

HTML4.0



<A>

<BASE>

HTML

HTML

■ <A>

▲ Top

(anchors)

%coreattrs,%i18n,%events

charset="..."

name="..."

href="..."URL

target="..."(_blank,_parent,_self,_top)

rel="..."

rev="..."

accesskey="..."

shape="..."(defaultrectcirclepoly)

coord="..."

tabindex="..."tabindex(tab)

<A> <A>

<A>

- href="index.html"

name

- href html

- href

href="index.html

#there"> <a href="http://www.school.net.hk/~chris55

/index.html#there"> there

nar

- name="hello"

<A> name

- target="_top"

_blank, _parent, _self, _top,

- target=""

""

- target="_blank" target="new"

- target="_parent"

- target="_self"

()

- target="_top"



```
<a href="http://www.fortuneage.com"></a>
<p><a href="http://www.goEway.com">
 alt="goEway"&gt;&lt;/a&gt; &lt;p&gt;&lt;a href="http://www.goEway.com"&gt; &lt;img src="link_image.gif" width=99 height=44 border=0 alt="goEway"&gt;&lt;/a&gt; </pre> |
|  | <br>      |

### PenPal Garden FAQ Page

|  |                                                                                                                                                                                 |
|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <pre> &lt;a name="test"&gt;&lt;/a&gt; &lt;a href="#test"&gt;&lt;/a&gt; &lt;br&gt;&lt;a href="http://www.school.net.hk/~chi/faq.html#14"&gt; PenPal Garden FAQ &lt;/a&gt; </pre> |
|  | <a href="#">PenPal Garden</a> <a href="#">FAQ</a>                                                                                                                               |

## ■ <BASE>

▲ Top

### URL

```

%coreattrs,%i18n,%events
href="..."URL
target="..."(_blank,_parent,_self,_top)

```

### HEAD

<BASE> <HEAD>

<BASE>

<base href="http://www.microsoft.com/" target="\_top">



# HTML

---

HTML4.0

---



```
<FRAMESET> <FRAME>
<NOFRAMES>
<IFRAME>
```

## HTML

HTML



```
URL <FRAMESET> <FRAME>
<BODY> <FRAMESET> <I
<FRAMESET>
```

```
< frameset cols="50%,*" > <frame name="hello" src="up2u.html"> <frame
name="hi" src="me2.html">
```

```
< /frameset>
```

```
<FRAMESET> up2u.html me2.html <FRAME>
```

■ <FRAMESET> <FRAME>

▲ Top

```
<FRAME>
```

```
name="..."
scr="..."
frameborder="..."(01)
margwidth="..."
margheight="..."
noresize="..."
scrolling="..."(auto, yes, no)
```

```
<FRAMESET>...</FRAMESET>
```

```
rows="..."
cols="..."
onload="..."
onunload="..."
```

FRAMESET

```
<FRAMESET>
 <frameset rows="90,*" frameborder="0" border=0 framespacing="2"
border="2" bordercolor="#008000"></frameset>
```

HTML

- COLS="90,\*"  
() \* COLS="30\*,50%"  
50%
- ROWS="120,\*"  
COLS ROWS <FRAMESET>

- `frameborder="0"`  
0 1 0 1
- `border="0"`  
pixels
- `bordercolor="#008000"`
- `framespacing="5"`


### <FRAME>


```
<frame name="top" src="a.html" marginwidth="5" marginheight="5"
scrolling="Auto" frameborder="0" noresize framespacing="6"
bordercolor="#0000FF">
```


- `SRC="a.html"`
- `NAME="top"`
- `frameborder=0`  
0 1 0 1
- `framespacing="6"`
- `bordercolor="#008000"`
- `scrolling="Auto"`

## YES NO AUTO

- `noresize`
- `marginheight=5`
- `marginwidth=5`


	HTML Code
	<pre>&lt;frameset rows="80,*"&gt;  &lt;frame name="top" src="a.html"&gt; &lt;frame name="bottom" src="b.html"&gt; &lt;/frameset&gt;</pre>

	HTML Code
	<pre>&lt;frameset rows="80,*,80"&gt;  &lt;frame name="top" src="a.html"&gt; &lt;frame name="middle" src="b.html"&gt; &lt;frame name="bottom" src="c.html"&gt; &lt;/frameset&gt;</pre>

	HTML Code
	<pre>&lt;frameset cols="150,*"&gt; &lt;frameset rows="80,*"&gt;  &lt;frame name="upper_left" src="a.html"&gt; &lt;frame name="lower_left" src="b.html"&gt; &lt;/frameset&gt;  &lt;frame name="right" src="c.html"&gt; &lt;/frameset&gt;</pre>

## HTML Code


```
<frameset rows="80,*">
```



```
<frame name="top" src="a.html">
 <frameset cols="150,*">
 <frame name="lower_left" src="b.html">
 <frame name="lower_right" src="c.html">
 </frameset>
</frameset>
```

## HTML Code

```
<frameset cols="150,*">
```



```
<frame name="left" src="a.html">
 <frameset rows="80,*">
 <frame name="upper_right" src="b.html">
 <frame name="lower_right" src="c.html">
 </frameset>
</frameset>
```

## ■ <NOFRAMES>

[▲ Top](#)

```
<NOFRAMES>
</NOFRAMES>
```

```
<frameset> </NOFRAMES>
```

```
<frameset rows="80,*">

 <noframes>
 <body>

 </body>
 </noframes>

 <frame name="top" src="a.html">
 <frame name="bottom" src="b.html">
</frameset>

<noframes>
```

## ■ <IFRAME>

▲ Top

```
name="..."
src="..."
frameborder="..."(01)
marginwidth="..."
marginheight="..."
align="..."(left, center, right, justify)
noresize="..."
scrolling="..."(auto, yes, no)
height="..."
width="..."
```

## IE

Script JavaScript Internet Explorer

```
<iframe>
 <iframe src="iframe.html" name="test" align="MIDDLE" width="300
height="100" marginwidth="1" marginheight="1" frameborder="1"
```

scrolling="Yes">

- `src="iframe.html"`
- `name="test"`  
target
- `align="MIDDLE"`  
left, right, top, middle, bottom
- `width="300" height="100"`  
pixels
- `marginwidth="1" marginheight="1"`
- `frameborder="1"`  
1 0 yes no
- `scrolling="Yes"`  
Yes No

	<pre>&lt;center&gt; &lt;iframe src="iframe.html" name="test"   align="MIDDLE" width="300" height="100"   marginwidth="5" marginheight="5" frameborder="1"&gt; IFrame                                     &lt;/iframe&gt; &lt;/center&gt;</pre>
	

# HTML

---

HTML4.0

---



<MAP> <AREA>

HTML

HTML

■ <MAP> <AREA>

```
<MAP>...</MAP>
```

```
AREA
```

```
%coreattrs
```

```
name="..."
```

```
<AREA>
```

```
shape="..."(default, rect, circle, poly)
```

```
coords="..."
```

```
href="..."URL
```

```
target="..."(, _blank, _parent, _self, _top)
```

```
nohref="..."
```

```
alt="..."
```

```
tabindex="..."tabindex"
```

# Image Map <MAP> <AREA>

---

HTML4.0

# HTML

---

HTML4.0

---



<BGSOUND>

<EMBED>

HTML

HTML

## ■ <BGSOUND>

<BGSOUND> IE

<BGSOUND src="your.mid" autostart=true loop=infinite>

- src="your.mid"  
midi
- autostart=true  
true false ()
- loop=infinite  
LOOP=2 Infinite

## ■ <EMBED>

EMBED> MidiWavAIFFAU Netscape IE

<EMBED src="your.mid" autostart="true" loop="true" hidden="true">

- **src**="your.mid"  
midi
  - **autostart**=true  
true false ()
  - **loop**="true"  
LOOP=2 true false
  - **HIDDEN**="true"  
true no ()
  - **STARTTIME**=":"  
STARTTIME="00:30" 30
  - **VOLUME**="0-100"  
0100
  - **WIDTH**=""      **HIGH**=""  
( HIDDEN="no")
  - **ALIGN**="center"  
topbottomcenterbaseline leftrighttexttopmiddle  
absmiddleabsbottom
  - **CONTROLS**="smallconsole"  
console  
console  
smallconsole  
playbutton  
pausecutton  
stopbutton  
volumelever
-

# HTML

---

HTML4.0

---



<MARQUEE>

<BLINK>

<ISINDEX>

<META>

<LINK>

HTML

HTML


## ■ <MARQUEE>

<MARQUEE>    **IE**    ""    Status                      Bar

	<code>&lt;marquee width=150&gt;I'm a small MARQUEE&lt;/marquee&gt;</code>
	

	<code>&lt;marquee behavior=slide&gt;This is a slide effect&lt;/marquee&gt;</code>
	T

	<code>&lt;marquee behavior=alternate&gt;</code> <code>&lt;/marquee&gt;</code>
	

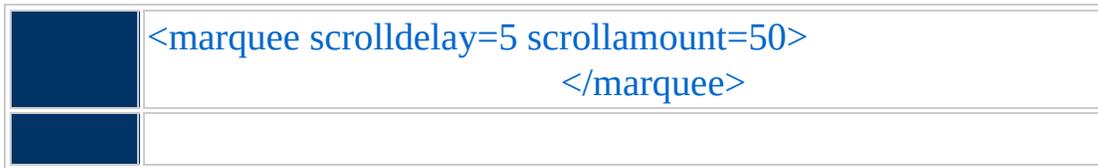

```
<marquee behavior="SCROLL" direction="LEFT" bgcolor="#0000FF" height="30" width="150" hspace="0" vspace="0" loop="INFINITE" scrollamount="30" scrolldelay="500">Hello</marquee>
```

- `behavior="SCROLL"`

SCROLL

SLIDE

ALTERNATE

- `direction="LEFT"`

LEFT

RIGHT

- `bgcolor="#0000FF"`

- `height="30" width="150"`

> 30% 30

- `hspace="0" vspace="0"`

- `loop="INFINITE"`

INFINITEINFINITE

- `scrollamount="30"`

- `scrolldelay="500"`

## ■ <BLINK>

▲ Top

<BLINK>

NC




## ■ <ISINDEX>

▲ Top

<ISINDEX> Web Server Web Server

<HEAD> <BODY> 3W

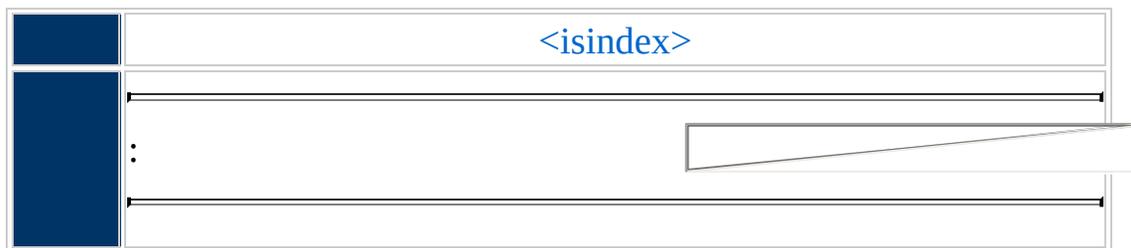

## ■ <META>

▲ Top

<META> <HEAD> </HEAD>

- <meta name="Description" content="This is Chris's Home Page">
- <meta name="Keywords" content="Chris, Web, Music, photo">
- <meta http-equiv="Expires" content="Tue, 09 Dec 1997 00:00:00 GMT">  
<meta http-equiv="Pragma" content="no-cache">

Expire

- `<meta http-equiv="Content-Type" content="text/html; charset=gb2312">`  
`<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">`  
HTML charset=gb2312charset=big5
- `<meta name="GENERATOR" content="Mozilla/4.04 [en] (Win95; I [Netscape])">`  
`<meta name="GENERATOR" content="Microsoft FrontPage 3.0">`
- `<meta http-equiv="refresh" content="10; url=http://www.hkiwc.com">`  
10 10

### ■ <LINK>

▲ Top

```
%coreattrs,%i18n,%events
href="..."URL
rel="..."
rev="..."
type="..."Internet
media="...(screen, print, projection, baille, speechall)"
target="..."(_blank,_parent,_self,_top)
```

HEAD

<LINK> URL <HEAD>

```
<link href="URL" rel="relationship">
<link href="URL" rev="relationship">
```

Style Sheet

---

HTML4.0

# HTML

---

HTML4.0

---



## HTML

HTML		
&lt;	<	
&gt;	>	
&amp;	&	
&quot;	"	
&reg;	?	
&copy;	?	
&trade;	?	
&ensp;		
&emsp;		
&nbsp;		

## ■ ISO Latin-1

HTML		
&AElig;	?	Uppercase AE diphthong
&Aacute;	á	Uppercase A, acute accent
&Acirc;	?	Uppercase A, circumflex accent
&Agrave;	à	Uppercase A, grave accent
&Aring;	?	Uppercase A, ring
&Atilde;	?	Uppercase A, tilde
		Uppercase A, dieresis or umlaut

&Auml;	?	mark
&Ccedil;	?	Uppercase C, cedilla
&ETH;	D	Uppercase Eth, Icelandic
&Eacute;	é	Uppercase E, acute accent
&Ecirc;	ê	Uppercase E, circumflex accent
&Egrave;	è	Uppercase E, grave accent
&Euml;	?	Uppercase E, dieresis or umlaut mark
&Iacute;	í	Uppercase I, acute accent
&Icirc;	?	Uppercase I, circumflex accent
&Igrave;	ì	Uppercase I, grave accent
&Iuml;	?	Uppercase I, dieresis or umlaut mark
&Ntilde;	?	Uppercase N, tilde
&Oacute;	ó	Uppercase O, acute accent
&Ocirc;	?	Uppercase O, circumflex accent
&Ograve;	ò	Uppercase O, grave accent
&Oslash;	?	Uppercase O, slash
&Otilde;	?	Uppercase O, tilde
&Ouml;	?	Uppercase O, dieresis or umlaut mark
&THORN;	T	Uppercase THORN, Icelandic
&Uacute;	ú	Uppercase U, acute accent
&Ucirc;	?	Uppercase U, circumflex accent
&Ugrave;	ù	Uppercase u, grave accent
&Uuml;	ü	Uppercase U, dieresis or umlaut mark
&Yacute;	Ý	Uppercase Y, acute accent
&aelig;	?	Lowercase ae diphthong
&aacute;	á	Lowercase a, acute accent
&acirc;	â	Lowercase a, circumflex accent

&agrave;	à	Lowercase a, grave accent
&aring;	?	Lowercase a, ring
&atilde;	?	Lowercase a, tilde
&auml;	?	Lowercase a, dieresis or umlaut mark
&ccedil;	?	Lowercase c, cedilla
&eth;	e	Lowercase eth, Icelandic
&eacute;	é	Lowercase e, acute accent
&ecirc;	ê	Lowercase e, circumflex accent
&egrave;	è	Lowercase e, grave accent
&euml;	?	Lowercase e, dieresis or umlaut mark
&iacute;	í	Lowercase i, acute accent
&icirc;	?	Lowercase i, circumflex accent
&igrave;	ì	Lowercase i, grave accent
&iuml;	?	Lowercase i, dieresis or umlaut mark
&ntilde;	?	Lowercase n, tilde
&oacute;	ó	Lowercase o, acute accent
&ocirc;	?	Lowercase o, circumflex accent
&ograve;	ò	Lowercase o, grave accent
&oslash;	?	Lowercase o, slash
&otilde;	?	Lowercase o, tilde
&ouml;	?	Lowercase o, dieresis or umlaut mark
&szlig;	?	Lowercase sharp s, German (sz ligature)
&thorn;	t	Lowercase thorn, Icelandic
&uacute;	ú	Lowercase u, acute accent
&ucirc;	?	Lowercase u, circumflex accent
&ugrave;	ù	Lowercase u, grave accent
		Lowercase u, dieresis or umlaut

&uuml;	ü	mark
&yacute;	y	Lowercase y, acute accent
&yuml;	?	Lowercase y, dieresis or umlaut mark

# HTML

---

HTML4.0

---



HTML

- **RED**
- RGB **#FF0000** red

RGB

" **red**" "green" "blue" HTML


red=ff, green=ff, blue=ff, RGB ffffff  
red=ff, green=00, blue=00, RGB ff0000  
red=00, green=ff, blue=00, RGB 00ff00  
red=00, green=00, blue=ff, RGB 0000ff  
red=00, green=00, blue=00, RGB 000000

RGB **#**

## ■ HTML

Internet Explorer





RGB



■ 16

Color	Value	Name	Color	Value	Name
	#00FFFF	aqua		#808080	gray
	#000080	navy		#C0C0C0	silver
	#000000	black		#008000	green
	#808000	olive		#008080	teal
	#0000FF	blue		#00FF00	lime
	#800080	purple		#FFFF00	yellow
	#FF00FF	fuchsia		#800000	maroon
	#FF0000	red		#FFFFFF	white

■

Color	Value	Name	Color	Value	Name
	#F0F8FF	aliceblue		#A00000	antiquewith
	#7FFFD4	aquamarine		#F0FFFF	azure
	#F5F5DC	beige		#FFE4C4	bisque
	#000000	black		#FFEBCD	blanchedalmond
	#0000FF	blue		#8A2BE2	blueviolet
	#A52A2A	brown		#DEB887	burlywood
	#5F9EA0	cadetblue		#7FFF00	chartreuse
	#D2691E	chocolate		#FF7F50	coral
	#C0F000	cornfloewrblue		#FFF8DC	cornsilk
	#00FFFF	cyan		#00008B	darkblue
	#008B8B	darkcyan		#B8860B	darkgoldenrod

	#A9A9A9	darkgray		#006400	darkgreen
	#DA0000	darkkhaki		#8B008B	darkmagenta
	#556B2F	darkolivegreen		#DA000E	darkorange
	#9932CC	darkorchid		#8B0000	darkred
	#E9967A	darksalmon		#8FBC8F	darkseagreen
	#483D8B	darkslateblue		#2F4F4F	darkslategray
	#00CED1	darkturquoise		#9400D3	darkviolet
	#FF1493	deeppink		#00BFFF	deepskyblue
	#696969	dimgray		#1E90FF	dodgerblue
	#B22222	firebrick		#FFFAF0	floralwhite
	#228B22	forestgreen		#DCDCDC	gainsboro
	#00000E	ghostwhite		#FFD700	gold
	#00E00D	goldenrod		#808080	gray
	#008000	green		#ADFF2F	greenyellow
	#F0FFF0	honeydew		#FF69B4	hotpink
	#CD5C5C	indianred		#FFFFFF0	ivory
	#F0E68C	khaki		#E6E6FA	lavender
	#FFF0F5	lavenderblush		#7CFC00	lawngreen
	#FFFACD	lemonchiffon		#ADD8E6	lightblue
	#F08080	lightcoral		#E0FFFF	lightcyan
	#0000E0	lightgoldenrod		#0000E0	lightgoldenrodyellow
	#0000A0	lightgray		#90EE90	lightgreen
	#FFB6C1	lightpink		#FFA07A	lightsalmon
	#20B2AA	lightseagreen		#87CEFA	lightskyblue
	#0000EB	lightslateblue		#778899	lightslategray
	#B0C4DE	lightsteelblue		#FFFFE0	lightyellow
	#32CD32	limegreen		#FAF0E6	linen
	#FF00FF	magenta		#800000	maroon
	#66CDAA	mediumaquamarine		#0000CD	mediumblue
	#BA55D3	mediumorchid		#ED0000	mediumpurple
	#3CB371	mediumseagreen		#7B68EE	mediumslateblue
	#00FA9A	mediumspringgreen		#48D1CC	mediumturquoise
					

	#C71585	mediumvioletred		#191970	midnightblue
	#F5FFFA	mintcream		#FFE4E1	mistyrose
	#FFE4B5	moccasin		#FFDEAD	navajowhite
	#000080	navy		#A0B0E0	navyblue
	#FDF5E6	oldlace		#6B8E23	olivedrab
	#FFA500	orange		#0E0EED	orengered
	#DA70D6	orchid		#A00D00	palegoldenrod
	#98FB98	palegreen		#AFEEEE	paleturquoise
	#DB7093	palevioletred		#FFefd5	papayawhip
	#FFDAB9	peachpuff		#CD853F	peru
	#FFC0CB	pink		#DDA0DD	plum
	#B0E0E6	powderblue		#800080	purple
	#FF0000	red		#BC8F8F	rosybrown
	#4169E1	royalblue		#8B4513	saddlebrown
	#FA8072	salmon		#F4A460	sandybrown
	#2E8B57	seagreen		#FFF5EE	seashell
	#A0522D	sienna		#87CEEB	skyblue
	#6A5ACD	slateblue		#708090	slategray
	#FFFAFA	snow		#00FF7F	springgreen
	#4682B4	steelblue		#D2B48C	tan
	#D8BFD8	thistle		#FF6347	tomato
	#40E0D0	turquoise		#EE82EE	violet
	#00E0ED	violetred		#F5DEB3	wheat
	#000E00	hite		#F5F5F5	whitesmoke
	#FFFF00	yellow		#9ACD32	yellowgreen

# HTML 4.0

---

HTML

---

<BDO>...</BDO>

lang="..."

dir="..."

dir

<BODY>...</BODY>

%conreattrs,%i18n,%events

background="..."URL

bgcolor="..."

text="..."

link="..."

vlink="..."

alink="..."

onload="..."

onunload="..."

BODYHEADBODYFRAMESET

<DIR>...</DIR>

%coreattrs,%i18n,%events  
aling="..."(left, right, center, justify)

P

<DOCTYPE...>

HTML

<HEAD>...</HEAD>

%i18n

profile="..."URLMETA

HTMLBODY

<HR>

%coreattrs%events

align="..."(left, right, center, justify)

noshade="..."

size="..."

width="..."

<HTML>...</HTML/>

%i18n  
version="..."URLHTML

<!DOCTYPE>

<META>

%i18n  
http-equiv="..."HTTP  
name="..."(meta)  
content="..."(meta)  
scheme="..."(meta)

<SPAN>...</SPAN>

%coreattrs,%i18n,%events

<TITLE>...</TITLE>

WebHEAD

%i18n

---

HTML

# HTML 4.0

---

HTML

---

<ACRONYM>...</ACRONYM>

%coreattrs,%i18n,%events

<ADDRESS>...</ADDRESS>

%coreattrs,%i18n,%events

BRADDRESS,

<BLOCKQUOTE>...</BLOCKQUOTE>

%coreattrs,%i18n,%events

cite="..."URL

<BR>

%coreattrs,%i18n,%events

clear="..."(none, left, right, all)

<CITE>...</CITE>

%coreattrs,%i18n,%events

<CODE>...</CODE>

%coreattrs,%i18n,%events

<DEL>...</DEL>

%coreattrs,%i18n,%events  
cite="..."URL  
datetime="..."

HTML4.0

<DFN>...</DFN>

(enclosed term)

%coreattrs,%i18n,%events

<EM>...</EM>

%coreattrs,%i18n,%events

<INS>...</INS>

%coreattrs,%i18n,%events

cite="..."URL

datetime="..."

HTML4.0

<KBD>...</KBD>

%coreattrs,%i18n,%events

<P>...</P>

%coreattrs,%i18n,%events

align="..."(left, right, center, justify)

<PRE>...</PRE>

%coreattrs,%i18n,%events  
WIDTH="..."

<Q>...</Q>

%coreattrs,%i18n,%events  
cite="..."URL

HTML4.0

<SAMP>...</SAMP>

%coreattrs,%i18n,%events

<STRONG>...</STRONG>

EM

%coreattrs,%i18n,%events

<SUB>...</SUB>

%coreattrs,%i18n,%events

<SUP>...</SUP>

%coreattrs,%i18n,%events

<VAR>...</VAR>

%coreattrs,%i18n,%events

# HTML 4.0

---

HTML

---

**<B>...</B>**

%coreattrs,%i18n,%events

**<BASEFONT>**

size="..."(17)

color="..."

face="..."

**<BIG>...</BIG>**

%coreattrs,%i18n,%events

**<FONT>...</FONT>**

size="..."(17)

color="..."  
face="..."

<I>...</I>

%coreattrs,%i18n,%events

<S>...</S>

%coreattrs,%i18n,%events

<SMALL>...</SMALL>

%coreattrs,%i18n,%events

<STRIKE>...</STRIKE>

%coreattrs,%i18n,%events

<TT>...</TT>

%coreattrs,%i18n,%events

<U>...</U>

%coreattrs,%i18n,%events

# HTML 4.0

---

HTML

---

`<DD>...</DD>` DL()

%coreattrs,%i18n,%events

(block-level)<P>

`<DIR>...</DIR>`

%coreattrs,%i18n,%events  
compact.

UL()UL

`<DL>...</DL>`

%coreattrs,%i18n,%events  
compact.

<DT><DD>

`<DT>...</DT>`

DL()

%coreattrs,%i18n,%events

()

<LI>...</LI>

%coreattrs,%i18n,%events  
type="..."(1,a,A,i,I)  
value="..."

<MENU>...</MENU>

%coreattrs,%i18n,%events  
compact.

UL()UL

<OL>...</OL>

%coreattrs,%i18n,%events  
type="..."(1,a,A,i,I)  
compact.  
start="..."

<UL>...</UL>

%coreattrs,%i18n,%events  
type="..."  
compact.

---

HTML

# HTML 4.0

---

HTML

---

**<A>...</A>** (anchors)

%coreattrs,%i18n,%events  
charset="..."  
name="..."  
href="..."URL  
target="..."(\_blank,\_parent,\_self,\_top)  
rel="..."  
rev="..."  
accesskey="..."  
shape="..."(defaultrectcirclepoly)  
coord="..."  
tabindex="..."tabindex(tab)

**<BASE>**

URL

%coreattrs,%i18n,%events  
href="..."URL  
target="..."(\_blank,\_parent,\_self,\_top)

HEAD

**<LINK>**

```
%coreattrs,%i18n,%events
href="..."URL
rel="..."
rev="..."
type="..."Internet
media="...(screen, print, projection, baille, speechall)"
target="..."(_blank,_parent,_self,_top)
```

HEAD

---

HTML

# HTML 4.0

---

HTML

---

<CAPTION>...</CAPTION>

%coreattrs,%i18n,%events  
align="..."(left,center,right,justify)

<COL>

%coreattrs,%i18n,%events  
span="..."  
width="..."  
align="..."(left,center,right,justify)  
char="..."  
charoff="..."  
valign="..."(top,middle,bottom,baseline)

<COLGROUP>...</COLGROUP>

%coreattrs,%i18n,%events  
span="..."  
width="..."  
align="..."(left,center,right,justify)

char="..."  
charoff="..."  
valign="..."(top,middle,bottom,baseline)

<TABLE>...</TABLE>

%coreattrs,%i18n,%events  
align="..."(left,center,right,justify)  
bgcolor="..."  
width="..."  
cols="..."  
border="..."  
frame="..."(void, above, below, hside, lhs, rhs,vsides,box,  
border)  
rules="..."(none, group, rows, cols, all)  
cellspacing="..."  
cellpadding="..."

<TBODY>...</TBODY>

%coreattrs,%i18n,%events  
align="..."(left,center,right,justify)  
char="..."  
charoff="..."  
valign="..."(top,middle,bottom,baseline)

<TD>...</TD>

%coreattrs,%i18n,%events  
axis="..."  
axes="..."  
nowarp="..."  
bgcolor="..."  
rowspan="..."  
colspan="..."  
align="..."(left,center,right,justify)  
char="..."  
charoff="..."  
valign="..."(top,middle,bottom,baseline)

<TFOOT>...</TFOOT>

%coreattrs,%i18n,%events  
align="..."(left,center,right,justify)  
char="..."  
charoff="..."  
valign="..."(top,middle,bottom,baseline)

<TH>...</TH>

%coreattrs,%i18n,%events  
axis="..."  
axes="..."  
nowarp="..."

bgcolor="..."  
rowspan="..."  
colspan="..."  
align="..."(left,center,right,justify)  
char="..."  
charoff="..."  
valign="..."(top,middle,bottom,baseline)

<THEAD>...</THEAD>

%coreattrs,%i18n,%events  
align="..."(left,center,right,justify)  
char="..."  
charoff="..."  
valign="..."(top,middle,bottom,baseline)

<TR>...</TR>

%coreattrs,%i18n,%events  
align="..."(left,center,right,justify)  
char="..."  
charoff="..."  
valign="..."(top,middle,bottom,baseline)

# HTML 4.0

---

HTML

---

## <FRAME>

name="..."  
scr="..."  
frameborder="..."(01)  
margwidth="..."  
margheight="..."  
noresize="..."  
scrolling="..."(auto, yes, no)

## <FRAMESET>...</FRAMESET>

rows="..."  
cols="..."  
onload="..."  
onunload="..."

FRAMESET

## <IFRAME>...</IFRAME>

name="..."  
scr="..."

frameborder="..."(01)  
marginwidth="..."  
marginheight="..."  
align="..."(left, center, right, justify)  
noresize="..."  
scrolling="..."(auto, yes, no)  
height="..."  
width="..."

<NOFRAMES>...</NOFRAMES>

# HTML 4.0

---

HTML

---

**<APPLET>...</APPLET>**

codebase="..."JavaURL  
archive="..."  
code="..."Java  
object="..."Java  
alt="..."  
name="..."Java  
width="..."  
height="..."  
align="..."(left, right, center, justify)  
hspace="..."  
vspace="..."

OBJECT

**<AREA>**

shape="..."(default, rect, circle, poly)  
coords="..."  
href="..."URL  
target="..."(, \_blank, \_parent, \_self, \_top)  
nohref="..."  
alt="..."  
tabindex="..."tabindex"

<IMG>

```
%coreattrs,%i18n,%events
src="..."URL
alt="..."
align="..."(left, right, center, justify)
width="..."
height="..."
border="..."
hspace="..."
vspace="..."
usemap="..."URL
ismap
```

<MAP>...</MAP>

AREA

```
%coreattrs
name="..."
```

<OBJECT>...</OBJECT>

```
%coreattrs,%i18n,%events
declare
classid="..."URL
codebase="..."URLURL
data="..."URL
```

type="..."Internet  
codetype="..."Internet  
standby="..."  
width="..."  
height="..."  
border="..."  
hspace="..."  
vspace="..."  
usemap="..."URL  
shapes="..."  
name="..."URL  
tabindex="..."tabindex"

## <PARAM>

name="..."  
value="..."  
valuetype="..."(data, ref, object)  
type="..."Internet

---

# HTML 4.0

---

HTML

---

<STYLE>...</STYLE>

%i18n

type="..."Internet

media="..."(screen, print, projection, braille,

s

title="..."

HEAD

---

HTML

# HTML 4.0

---

HTML

---

**<BUTTON>...</BUTTON>**

%coreattrs,%i18n,%events  
name="..."  
value="..."  
type="..."(button, submit, reset)  
disabled="..."  
tabindex="..."tabindex  
onfocus="..."  
onblur="..."

**<FIELDSET>...</FIELDSET>**

%coreattrs,%i18n,%events

**<FORM>...</FORM>**

%coreattrs,%i18n,%events  
action="..."URL  
method="..."HTTP(get, post)get  
enctype="..."MIME(Internet)  
onsubmit="..."

noreset="..."  
target="..."(\_blank, \_parent, \_self, \_top)  
accept\_charset="..."

## <INPUT>

%coreattrs,%i18n,%events  
type="..."  
(text,password,checkbox,radio,submit,reset,file,hidden,image,button)  
name="..."(submitreset)  
value="..."  
checked="..."  
disabled="..."  
readonly="..."  
size="..."  
maxlength="..."  
src="..."URL  
alt="..."  
usemap="..."URL  
align="..."(left, center, right, justify)  
tabindex="..."tabindex  
onfocus="..."  
onblur="..."  
onselect="..."  
onchang="..."  
accept="..."

## <ISINDEX>

%coreattrs,%i18n  
prompt="..."

<LABEL>...</LABEL>

%coreattrs,%i18n,%events  
for="..."  
disabled="..."  
accesskey="..."  
onfocus="..."  
onblur="..."

<LEGEND>...</LEGEND>

FIELDSET

%coreattrs,%i18n,%events  
align="..."(left, center, right, justify)  
accesskey="..."

<OPTION>...</OPTION>

SELECT

%coreattrs,%i18n,%events  
selected="..."  
disabled="..."  
value="..."

<SELECT>...</SELECT>

%coreattrs,%i18n,%events  
name="..."  
size="..."  
multiple  
disabled="..."  
tabindex="..."tabindex  
onfocus="..."  
onblur="..."  
onselect="..."  
onchang="..."

<TEXTAREA>...</TEXTAREA>

%coreattrs,%i18n,%events  
name="..."  
rows="..."  
cols="..."  
disabled="..."  
readonly="..."  
tabindex="..."tabindex  
onfocus="..."  
onblur="..."  
onselect="..."  
onchang="..."

---

HTML

# HTML 4.0

---

HTML

---

`<SCRIPT>...</SCRIPT>`

`type="..."`  
`language="..."type`

META

`<NOSCRIPT>...</NOSCRIPT>`

---

HTML

Iframe