
[HTML \(Tag\)\(Index\)](#)

[\(Page\)](#) [\(Font\)](#) [\(Text Style\)](#) [\(Image\)](#) [\(Form\)](#)

[\(Table\)](#) [\(Advanced\)](#) [\(Frames\)](#)

[\(Marquee\)](#) [\(Alternative Inline Elements\)](#)



HTML (Tag)(Index)

[\(Attribute\)](#)

(Tags)

a

[Link](#)

area

[Map](#)

b

[Physical Font Style](#)

basefont

[Default Font Size](#)

big

[Logical Font Style](#)

blink

[Other text element](#)

blockquote

[Other text element](#)

body

[Document Structure](#)

[Background Color](#)

br

[Line Control](#)

[Floating Image](#)

caption

[Caption](#)

center

[Centering](#)

cite

[Logical Font Style](#)

code

[Logical Font Style](#)

dd

[Basic Listings](#)

dfn

[Logical Font Style](#)

div

[Division](#)

dl

[Basic Listings](#)

dt

[Basic Listings](#)

em

[Logical Font Style](#)

fig

[Floating Image](#)

font

[Font Size](#)

[Font Color](#)

[Font Face](#)

form

[Form Basic Structure](#)

frame

[Frames](#)

frameset

[Frames](#)

h1 ... h6

[Header](#)

[Centering](#)

head

[Document Structures](#)

hr

[Horizontal Rules](#)

html

[Document Structures](#)

i

[Physical Font Style](#)

img

[Basic Rules of Image](#)

input

[Form Basic Structure](#)

kbd

[Logical Font Style](#)

left

[Math Basic Control](#)

li

[Basic Listings](#)

[Customized listing items](#)

listing

[Preformatted Text](#)

map

[Map](#)

marquee

[Marquee](#)

math

[Math Basic Control](#)

nobr

[Line Control](#)

noframes

[Frames](#)

ol

[Basic Listings](#)

[Customized listing items](#)

option

[Selectable Menu](#)

over

[Fraction](#)

p

[Line Control](#)

pre

[Preformatted Text](#)

right

[Math Basic Control](#)

s

[Other Style](#)

select

[Selectable Menu](#)

small

[Logical Font Style](#)

strong

[Logical Font Style](#)

sub

[Other Style](#)

sup

[Other Style](#)

table

[Table Basic Tags](#)

textarea

[Text Area](#)

td

[Table Basic Tags](#)

th

[Table Basic Tags](#)

tr

[Table Basic Tags](#)

tt

[Physical Font Style](#)

u

[Physical Font Style](#)

ul

[Basic Listings](#)

var

[Logical Font Style](#)

xmp

[Preformatted Text](#)

(Tag)(Attributes)

action

[Form Basic Structure](#)

align

[Horizontal Rules](#)

[Centering](#)

[Division](#)

[Image aligned with Text](#)

[Floating Image](#)

[Table Text Layout](#)

[Floating Table](#)

[Marquee](#)

alink

[Background and Text Color](#)

alt

[Basic Rules of Image](#)

background

[Background and Text Color](#)

behavior

[Marquee](#)

bgcolor

[Background and Text Color](#)

[Cell Color](#)

[Marquee](#)

border

[Border Line](#)

[Table Size](#)

cellpadding

[Table Size](#)

cellspacing

[Table Size](#)

checked

[Checkbox & Radio](#)

clear

[Floating Image](#)

color

[Font Color](#)

cols

[Text Area](#)

[Frame Size](#)

colspan

[Table Span](#)

compact

[Basic Listings](#)

coords

[Map](#)

direction

[Marquee](#)

face

[Font Face](#)

height

[Table Size](#)

[Marquee](#)

href

[Link](#)

[Map](#)

hspace

[Floating Image](#)

[Marquee](#)

link

[Background and Text Color](#)

loop

[Marquee](#)

marginheight

[Frame Margin](#)

marginwidth

[Frame Margin](#)

maxlength

[Text & Password](#)

method

[Form Basic Structure](#)

multiple

[Selectable Menu](#)

name

[Form Basic Structure](#)

[Link](#)

[Frame](#)

noresize

[Frame Size](#)

rows

[Text Area](#)
[Frame Size](#)

rowspan
[Table Span](#)

scrollamount
[Marquee](#)

scrolldelay
[Marquee](#)

scrolling
[Scroll Bar](#)

selected
[Selectable Menu](#)

shape
[Map](#)

size
[Horizontal Rules](#)
[Font Size](#)
[Text & Password](#)
[Selectable Menu](#)

src
[Basic Rules of Image](#)

[Image coordinates](#)

start
[Customized listing items](#)

target
[Target Windows](#)

text

[Background and Text Color](#)

type

[Customized listing items](#)

[Form Basic Structure](#)

valign

[Table Text Layout](#)

value

[Text & Password](#)

[Checkbox & Radio](#)

[Hidden Elements](#)

[Selectable Menu](#)

vlink

[Background and Text Color](#)

vspace

[Floating Image](#)

[Marquee](#)

width

[Horizontal Rules](#)

[Table Size](#)

[Marquee](#)

wrap

[Textarea Word Wrapping](#)

**[HTML Design Guide Main Page](#)**

[Contents](#) || [Page](#) || [Font](#) || [Text Style](#) || [Image](#) || [Form](#) || [Table](#) || [Table Advanced](#)
|| [Frames](#) || [Marquee](#) || [Alternative Inline Elements](#) || [Math](#)

Tag Index || [What's New](#)

Network Communication Design

<http://ncdesign.kyushu-id.ac.jp/>

C&P 1994-1996 Yuriho Ienaga v91102@vgenda.kyushu-id.ac.jp

(PAGE)(TAGS)

● HTML (Document Structures)

<html>...</html>

<head>...</head>

<body>...</body>

`<HTML>`

`<HEAD>`

`<title>, <base>, <link>, <isindex>, <meta>`

`</HEAD>`

`<BODY>`

`HTML`

`</BODY>`

`</HTML>`

● (Charsets) Netscape Only

```
<meta http-equiv="Content-Type"  
content="text/html; charset=#">
```

#=

us-ascii, iso-8859-1, x-mac-roman, iso-8859-2, x-mac-ce,
iso-2022-jp, x-sjis, x-euc-jp,
euc-kr, iso-2022-kr,
gb2312, gb_2312-80,
x-euc-tw, x-cns11643-1, x-cns11643-2, big5

HTML MIME
(language encoding)
HTML

[\(entities\)](#)



<body bgcolor=# text=# link=# alink=# vlink=#>

bgcolor ---

text ---

link ---

alink ---

vlink --- ()

#=rrggbb

16 (red-green-blue, RGB)

16 : 0,1,2,3,4,5,6,7,8,9,a,b,c,d,e,f.

<body background="image-URL">

Non Scrolling Background <body bgproperties=FIXED> IE Explorer Only

● **(Margin)** IE Explorer Only

<body leftmargin=#>

() <body topmargin=#> #=margin amount

● (Link)

** ... **

```
<a href="samp/link.html"></a>
!
```

!

** ... **

** ... **

```
<a href="#jump-test">"</a><P>
<a name="jump-test"></a>
```

""

** ... **

** ... **

```
<a href="samp/link.html#jump-test"></a>
```

● () (Target Window)

** ... **

```
<a href="samp/window.html" target="window_name">  
!  
</a>
```

!



<hr>

`<hr>`




<hr size=#>

`<hr size=10>`




<hr width=#>

`<hr width=50>`
`<hr width=50%>`



<hr align=#> #=left, right

`<hr width=50% align=left>`
`<hr width=50% align=right>`



<hr noshade>

`<hr noshade>`



<hr color=#> IE Explorer Only

#=rrggbb 16 RGB
Black, Olive, Teal, Red, Blue, Maroon, Navy, Gray, Lime,
Fuchsia, , Green, Purple, Silver, Yellow, Aqua

`<hr color="red">`





[HTML Design Guide Main Page](#)

[Contents](#) || [Page](#) || [Font](#) || [Text Style](#) || [Image](#) || [Form](#) || [Table](#) || [Table Advanced](#)
|| [Frames](#) || [Marquee](#) || [Alternative Inline Elements](#)

[Tag Index](#) || [What's New](#)

Network Communication Design

<http://ncdesign.kyushu-id.ac.jp/>

C&P 1994-1996 Yuriko Ienaga v91102@vgenda.kyushu-id.ac.jp

(FONT)(TAGS)

● (Header)

`<h#> ... </h#> #=1, 2, 3, 4, 5, 6`

`<h1></h1>`

`<h2></h2>`

`<h3></h3>`

`<h4></h4>`

`<h5></h5>`

`<h6></h6>`

- `<hn>---</hn>`
- `<hn>---</hn> <p>`



** ... #=1, 2, 3, 4, 5, 6, 7 or +#, -#**

<basefont size=#> #=1, 2, 3, 4, 5, 6, 7

● (Physical Style)

<i></i>

<u></u> —

<tt></tt>

<s></s> —

<strike></strike> —

● (Logical Style)

<code></code>

<samp></samp>

<kbd></kbd>

<var></var>

<dfn></dfn>

<cite></cite>

<small></small>

<big></big>



```
<i><font size=5>  
    <b></b> <font size=6> </font>  
</font></i>
```



** ... **

#=rrggbb 16

Black, Olive, Teal, Red, Blue, Maroon, Navy, Gray, Lime,
Fuchsia, , Green, Purple, Silver, Yellow, Aqua

White &
White

&

● (Font Face)

` ... `

`#=`

` Hellow World!`

Hellow World!

(Font Face)

● (Entities)

&#; #= ascii

HTML2.0

&	&
<	<
>	>
"	"

[HTML2.0](#)

[HTML3.2](#)

[ISO](#)



[HTML Design Guide Main Page](#)

[Contents](#) || [Page](#) || [Font](#) || [Text Style](#) || [Image](#) || [Form](#) || [Table](#) || [Table Advanced](#)
|| [Frames](#) || [Marquee](#) || [Alternative Inline Elements](#)

[Tag Index](#) || [What's New](#)

Network Communication Design

<http://ncdesign.kyushu-id.ac.jp/>

C&P 1994-1996 Yuriko Ienaga v91102@vgenda.kyushu-id.ac.jp

(TEXT STYLE)(TAGS)



(Paragraph) 0 `<p>`

`<p>`

**`
`**

`
`

`<nobr>`

`<nobr>`

`</nobr>`

● (Alignment)

`<hn align=#>...</hn>`

`<p align=#>...</p>` #=left, center, right

```
<h3 align=center>Hello<\h3>  
<h3 align=right>Hello<\h3>
```

Hello

Hello

`<center>...</center>`

```
<center>Hello</center>
```

Hello

● (Division)

<div align=left> ... </div>

```
<div align=left>  
Can you feel happiness without unpleasant? <br>  
Please show me your smile.  
</div>
```

Can you feel happiness without unpleasant?
Please show me your smile.

<div align=center> ... </div>

Can you feel happiness without unpleasant?
Please show me your smile.

<div align=right> ... </div>

Can you feel happiness without unpleasant?
Please show me your smile.



...

```
<ul>
<li>Today
<li>Tomorrow
</ul>
```

- Today
- Tomorrow

...

```
<ol>
<li>Today
<li>Tomorrow
</ol>
```

1. Today
2. Tomorrow

(Definition lists) <dl><dt>...<dd>...</dl>

```
<dl>
<dt>Today
<dd>Today is yesterday.
<dt>Tomorrow
<dd>Tomorrow is today.
</dl>
```

Today

Today will be yesterday.

Tomorrow

Tomorrow will be today.

Definition lists Compact <dl compact><dt>...<dd>...</dl>

Today

```
<dl compact>
<dt>Today
```

Today will be yesterday.
Next
Tomorrow will be today.

```
<dd>Today is yesterday.  
<dt>Tomorrow  
<dd>Tomorrow is today.  
</dl>
```



<li type=#> #=disk, circle, square

```
<ul>
<li type=disc>ONE
<li type=circle>TWO
<li type=square>THREE
</ul>
```

- ONE
- TWO
- THREE

<li type=#> #=A, a, I, i, 1

```
<ol><li type=A>ONE-ONE
<li>ONE-TWO</ol>
```

A. ONE-ONE

```
2. ONE-TWO
<ol><li type=a>ONE-ONE
<li>ONE-TWO</ol>
```

a. ONE-ONE

```
2. ONE-TWO
<ol><li type=I>ONE-ONE
<li>ONE-TWO</ol>
```

I. ONE-ONE

```
2. ONE-TWO
<ol><li type=i>ONE-ONE
<li>ONE-TWO</ol>
```

i. ONE-ONE

```
2. ONE-TWO
<ol><li type=1>ONE-ONE
<li>ONE-TWO</ol>
```

1. ONE-ONE

```
2. ONE-TWO
```

<ol start=#> #=number

```
<ol start=5>
<li type=A>ONE-ONE
```

```
<li>ONE-TWO
  <ol start=10>
    <li>TWO-ONE
    <li type=i>TWO-TWO
  </ol></ol>
```

E. ONE-ONE

6. ONE-TWO

10. TWO-ONE

xi. TWO-TWO

● (Preformatted Text)

<pre>...</pre>

```
<pre>
Please use your card.
VISA Master
<b>Here is an order form.</b>
<ul><li>Fax
<li>Air Mail</ul>
</pre>
```

Please use your card
VISA Master
Here is an order form.

- Fax
- Air Mail

<listing>...</listing>

```
<listing>
Please use your card.
VISA Master
<b>Here is an order form.</b>
<ul><li>Fax
<li>Air Mail</ul>
</listing>
```

Please use your card.
VISA Master
Here is order form.

- Fax
- Air Mail

<xmp>...</xmp>

```
<xmp>
Please use your card.
VISA Master
<b>Here is an order form.</b>
<ul><li>Fax
```

Air Mail
</xmp>

Please use your card.

VISA Master

Here is order form.

Fax

Air Mail

(Spacer) Netscape Only

<spacer type="horizontal" size=#> #=

<spacer type="vertical" size=#> #=

```
YESTERDAY <spacer type="horizontal" size=50> TODAY  
<spacer type="vertical" size=50> TOMORROW
```

YESTERDAY TODAY TOMORROW

<spacer type="block" width=# height=# align=##>

#=

##=top, middle, bottom, left, right

```
<spacer type="block" width=150 height=50 align=left>  
YESTERDAY<br> TODAY<br> TOMORROW
```

YESTERDAY

TODAY

TOMORROW



Netscape Only

<multicol cols=#> ... </multicol> #=

```
<multicol cols=2> text text text... </multicol>
```

<multicol gutter=#> ... </multicol> #=

```
<multicol cols=2 gutter=100> text text text... </multicol>
```

<multicol width=#> ... </multicol> #=

```
<multicol cols=2 width=400> text text text... </multicol>
```




(Blockquote) <blockquote>...</blockquote>

Her Song:

```
<blockquote>
```

```
When I was young, I listened to the radio  
waiting for my favorite songs....
```

```
</blockquote>
```

Her Song:

When I was young, I listened to the radio waiting for my favorite songs....

<blink>...</blink>

```
<BLINK> </BLINK>
```



[HTML Design Guide Main Page](#)

[Contents](#) || [Page](#) || [Font](#) || [Text Style](#) || [Image](#) || [Form](#) || [Table](#) || [Table Advanced](#)
|| [Frames](#) || [Marquee](#) || [Alternative Inline Elements](#)

[Tag Index](#) || [What's New](#)

Network Communication Design

<http://ncdesign.kyushu-id.ac.jp/>

C&P 1994-1996 Yuriko Ienaga v91102@vgenda.kyushu-id.ac.jp

(IMAGE)(TAGS)



** #= URL**

#=

``





** #=top, middle, bottom**

` My face!`



My Face!

` My face!`



My Face!

` My face!`



My Face!

-)
- Only one text line can be flow into the both side of Image.

●/(Floating Image)


```
<img src=URL align=left>My Face!<br>
It is always<br>
smiling.<br>
Hahaha....<br>
```



My Face!

It is always
smiling.
Hahaha....



My Face!

It is always
smiling.
Hahaha....

<br clear=all>

```
<img src=URL align=left>My Face!<br>
It is always
<br clear=all>
smiling.<br>
Hahaha....<br>
```



My Face!

It is always

smiling.
Hahaha....

** #=value**

```
<img src=URL align=left vspace=10 hspace=20>My Face!<br>  
It is always<br>  
smiling.<br>  
Hahaha....<br>
```




My Face!

It is always
smiling.
Hahaha....



** #=value**

```
<a href="URL">  
<img src=URL border=15>  
</a>
```



● [\(Client Side Image Map\)](#)



[HTML Design Guide Main Page](#)

[Contents](#) || [Page](#) || [Font](#) || [Text Style](#) || [Image](#) || [Form](#) || [Table](#) || [Table Advanced](#)
|| [Frames](#) || [Marquee](#) || [Alternative Inline Elements](#)

[Tag Index](#) || [What's New](#)

Network Communication Design

<http://ncdesign.kyushu-id.ac.jp/>

C&P 1994-1996 Yuriko Ienaga v91102@vgenda.kyushu-id.ac.jp

(TABLE)(TAGS)



<table>...</table> -

<tr> -

<th> -

<td> - ()

```
<table border>
<tr><th>Food</th><th>Drink</th><th>Sweet</th>
<tr><td>A</td><td>B</td><td>C</td>
</table>
```

Food	Drink	Sweet
A	B	C

```
<table>
<tr><th>Food</th><th>Drink</th><th>Sweet</th>
<tr><td>A</td><td>B</td><td>C</td>
</table>
```

Food Drink Sweet

A B C

● (Table Span)

<th colspan=#>

```
<table border>
<tr><th colspan=3> Morning Menu</th>
<tr><th>Food</th>      <th>Drink</th>  <th>Sweet</th>
<tr><td>A</td><td>B</td><td>C</td>
</table>
```

Morning Menu		
Food	Drink	Sweet
A	B	C

<th rowspan=#>

```
<table border>
<tr><th rowspan=3> Morning Menu</th>
      <th>Food</th> <td>A</td></tr>
<tr><th>Drink</th> <td>B</td></tr>
<tr><th>Sweet</th> <td>C</td></tr>
</table>
```

Morning Menu	Food	A
	Drink	B
	Sweet	C



<table border=#>

```
<table border=10>  
<tr><th>Food</th><th>Drink</th><th>Sweet</th>  
<tr><td>A</td><td>B</td><td>C</td>  
</table>
```

Food	Drink	Sweet
A	B	C

<table border width=# height=#>

```
<table border width=170 height=100>  
<tr><th>Food</th><th>Drink</th><th>Sweet</th>  
<tr><td>A</td><td>B</td><td>C</td>  
</table>
```

Food	Drink	Sweet
A	B	C

<table border cellpadding=#>

```
<table border cellpadding=10>  
<tr><th>Food</th><th>Drink</th><th>Sweet</th>  
<tr><td>A</td><td>B</td><td>C</td>  
</table>
```

Food	Drink	Sweet
A	B	C

Food	Drink	Sweet
A	B	C

<table border cellpadding=#>

```
<table border cellpadding=10>  
<tr><th>Food</th><th>Drink</th><th>Sweet</th>  
<tr><td>A</td><td>B</td><td>C</td>  
</table>
```

Food	Drink	Sweet
A	B	C



<tr align=#>

<th align=#> #=left, center, right

<td align=#>

```
<table border width=160>
<tr>
    <th>Food</th><th>Drink</th><th>Sweet</th>
<tr>
    <td align=left>A</td>
    <td align=center>B</td>
    <td align=right>C</td>
</table>
```

Food	Drink	Sweet
A	B	C

<tr valign=#>

<th valign=#> #=top, middle, bottom, baseline

<td valign=#>

```
<table border height=100>
<tr>
    <th>Food</th><th>Drink</th>
    <th>Sweet</th><th>Other</th>
<tr>
    <td valign=top>A</td>
    <td valign=middle>B</td>
    <td valign=bottom>C</td>
    <td valign=baseline>D</td>
</table>
```

Food	Drink	Sweet	Other
------	-------	-------	-------

A	B	C	D
---	---	---	---

● / (Floating Table)

<table align=left>

```
<table align="left" border>
<tr><th>Food</th><th>Drink</th><th>Sweet</th>
<tr><td>A</td><td>B</td><td>C</td>
</table>
```

My favorites...
cookies, chocolates, and more.

Food	Drink	Sweet
A	B	C

My favorites...
cookies, chocolates, and more.

<table align=right>

Food	Drink	Sweet
A	B	C

My favorites...
cookies, chocolates, and more.

<table vspace=# hspace=#> #=space value Netscape Only

```
<table align="left" border vspace=20 hspace=30>
<tr><th>Food</th><th>Drink</th><th>Sweet</th>
<tr><td>A</td><td>B</td><td>C</td>
</table>
```

My favorites...
cookies, chocolates, and more.

Food	Drink	Sweet
A	B	C

My favorites...

cookies, chocolates, and more.



<caption align=#> ... </caption> #=left, center, right

```
<table border>
<caption align=center>Lunch</caption>
<tr><th>Food</th><th>Drink</th><th>Sweet</th>
<tr><td>A</td><td>B</td><td>C</td>
</table>
```

Lunch

Food	Drink	Sweet
A	B	C

<caption valign=#> ... </caption> #=top, bottom

- valign=top is default.

```
<table border>
<caption valign=bottom>Lunch</caption>
<tr><th>Food</th><th>Drink</th><th>Sweet</th>
<tr><td>A</td><td>B</td><td>C</td>
</table>
```

Lunch

Food	Drink	Sweet
A	B	C



[HTML Design Guide Main Page](#)

[Contents](#) || [Page](#) || [Font](#) || [Text Style](#) || [Image](#) || [Form](#) || [Table](#) || [Table Advanced](#)
|| [Frames](#) || [Marquee](#) || [Alternative Inline Elements](#)

[Tag Index](#) || [What's New](#)

Network Communication Design

<http://ncdesign.kyushu-id.ac.jp/>

C&P 1994-1996 Yuriko Ienaga v91102@vgenda.kyushu-id.ac.jp

(TABLE ADVANCED)



<th bgcolor=#>

<th background="URL"> IE Explorer Only

#=rrgbb 16 RGB ,
Black, Olive, Teal, Red, Blue, Maroon, Navy, Gray, Lime,
Fuchsia, , Green, Purple, Silver, Yellow, Aqua

```
<table border>
<tr><th bgcolor=ffaa00>Food</th>
    <th bgcolor=Red>Drink</th>
    <th rowspan=2 background="image.gif">Sweet</th>
<tr bgcolor=white><td>A</td><td>B</td>
</table>
```

Food	Drink	Sweet
A	B	

IE Explorer Only

<table bordercolor=#>

```
<table cellpadding=5 border=5 bordercolor=#ffaa00>
<tr><th>Food</th><th>Drink</th><th>Sweet</th>
<tr><td>A</td><td>B</td><td>C</td>
</table>
```

Food	Drink	Sweet
A	B	C

IE Explorer Only

<table bordercolorlight=#>

<table bordercolordark=#>

```
<table cellpadding=5 border=5
    bordercolorlight=White bordercolordark=Maroon>
<tr><th>Food</th><th>Drink</th><th>Sweet</th>
```

```
<tr><td>A</td><td>B</td><td>C</td>  
</table>
```

Food	Drink	Sweet
A	B	C

● (Structured Table) IE Explorer Only

<thead> ... </thead> - (Header)

<tbody> ... </tbody> - (Body)

<tfoot> ... </tfoot> - (Footer)

```
<table border>
<thead>
  <tr><th>Food</th><th>Drink</th><th>Sweet</th>
</thead>
<tbody>
  <tr><td>A</td><td>B</td><td>C</td>
  <tr><td>D</td><td>E</td><td>F</td>
</tbody>
</table>
```

Food	Drink	Sweet
A	B	C
D	E	F

<colgroup align=#> #=left, right, center

```
<table border width=160>
<colgroup align=left>
<colgroup align=center>
<colgroup align=right>
  <thead>
    <tr><th>Food</th><th>Drink</th><th>Sweet</th>
  </thead>
  <tbody>
    <tr><td>A</td><td>B</td><td>C</td>
    <tr><td>D</td><td>E</td><td>F</td>
  </tbody>
</table>
```

Food	Drink	Sweet
A	B	C

D	E	F
---	---	---

<col span=#> #=

<col align=#> #=left, right, center

```

<table border width=160>
<colgroup>
  <col align=center span=2>
<colgroup align=right>
  <thead>
    <tr><th>Food</th><th>Drink</th><th>Sweet</th>
  </thead>
  <tbody>
    <tr><td>A</td><td>B</td><td>C</td>
    <tr><td>D</td><td>E</td><td>F</td>
  </tbody>
</table>

```

Food	Drink	Sweet
A	B	C
D	E	F



4 <table frame=box>

```
<table border frame=box>
<thead>
  <tr><th>Food</th><th>Drink</th><th>Sweet</th>
</thead>
<tbody>
  <tr><td>A</td><td>B</td><td>C</td>
  <tr><td>D</td><td>E</td><td>F</td>
</tbody>
</table>
```

Food	Drink	Sweet
A	B	C
D	E	F

<table frame=above>

Food	Drink	Sweet
A	B	C
D	E	F

<table frame=below>

Food	Drink	Sweet
A	B	C
D	E	F

<table frame=hsides>

Food	Drink	Sweet
A	B	C
D	E	F

<table frame=vsides>

Food	Drink	Sweet
A	B	C
D	E	F

<table frame=lhs>

Food	Drink	Sweet
A	B	C
D	E	F

<table frame=rhs>

Food	Drink	Sweet
A	B	C
D	E	F

<table frame=void>

Food	Drink	Sweet
A	B	C
D	E	F

● (Rules) IE Explorer Only

<table rules=all>

```
<table border rules=all>
<colgroup><col align=center span=2>
<colgroup align=right>
  <thead>
    <tr><th>Food</th><th>Drink</th><th>Sweet</th>
  </thead>
  <tbody>
    <tr><td>A</td><td>B</td><td>C</td>
    <tr><td>D</td><td>E</td><td>F</td>
  </tbody>
  <tbody>
    <tr><td rowspan=3 align=right>Total $-00.0</td>
  </tbody>
</table>
```

Food	Drink	Sweet
A	B	C
D	E	F
Total \$-00.0		

(Groups) <table rules=groups>

Food	Drink	Sweet
A	B	C
D	E	F
Total \$-00.0		

<table rules=rows>

Food	Drink	Sweet
A	B	C
D	E	F
Total \$-00.0		

<table rules=cols>

Food	Drink	Sweet
A	B	C
D	E	F
Total \$-00.0		

<table rules=none>

Food	Drink	Sweet
A	B	C
D	E	F
Total \$-00.0		



[HTML Design Guide Main Page](#)

[Contents](#) || [Page](#) || [Font](#) || [Text Style](#) || [Image](#) || [Form](#) || [Table](#) || [Table Advanced](#)
|| [Frames](#) || [Marquee](#) || [Alternative Inline Elements](#)

[Tag Index](#) || [What's New](#)

Network Communication Design

<http://ncdesign.kyushu-id.ac.jp/>

C&P 1994-1996 Yuriko Ienaga v91102@vgenda.kyushu-id.ac.jp

(FORM)(TAGS)



```
<form action="url" method=*>  
...  
...  
<input type=submit> <input type=reset>  
</form>
```

*=GET, POST

```
<input type=* name=**>
```

*=text, password, checkbox, radio, image, hidden, submit, reset

**=Symbolic Name for CGI script



*=text, password

<input type=* >

<input type=* value= >**

```
<form action=/cgi-bin/post-query method=POST>
:
<input type=text name=><br>
:
<input type=text name= value=http://><br>
:
<input type=password name=><br>
<input type=submit value=""><input type=reset value="">
</form>
```

:

:

:

<input type=* size= >**

<input type=* maxlength= >**

```
<form action=/cgi-bin/post-query method=POST>
<input type=text name=a01 size=40><br>
<input type=text name=a02 maxlength=5><br>
<input type=submit><input type=reset>
</form>
```

● (Checkbox) (RadioButton)

<input type=checkbox>

<input type=checkbox checked>

<input type=checkbox value=>**

```
<form action=/cgi-bin/post-query method=POST>
<input type=checkbox name=1>
  Banana<p>
<input type=checkbox name=2 checked>
  Apple<p>
<input type=checkbox name=3 value=>
  Orange<p>
<input type=submit><input type=reset>
</form>
```

Banana

Apple

Orange

<input type=radio value=>**

<input type=radio value= checked>**

```
<form action=/cgi-bin/post-query method=POST>
<input type=radio name=>
  Banana<p>
<input type=radio name= checked>
  Apple<p>
<input type=radio name= value=>
  Orange<p>
<input type=submit><input type=reset>
</form>
```


Banana

Apple

Orange



<input type=image src=url>

```
<form action=/cgi-bin/post-query method=POST>
<input type=image name=face src=f.gif><p>
<input type=radio name=zoom value=2 checked>x2
<input type=radio name=zoom value=4>x4
<input type=radio name=zoom value=6>x6<p>
<input type=reset>
</form>
```



x2 x4 x6

Reset



<input type=hidden value=*>

```
<form action=/cgi-bin/post-query method=POST>  
<input type=hidden name=add value=hoge@hoge.jp>  
Here is a hidden element. <p>  
<input type=submit><input type=reset>  
</form>
```

Here is a hidden element.

● (Selectable Menu)

<select name=*>

<option> ...

</select>


<option selected>

<option value=>**

```
<form action=/cgi-bin/post-query method=POST>
<select name=fruits>
  <option>Banana
  <option selected>Apple
  <option value=My_Favorite>Orange
</select><p>
<input type=submit><input type=reset>
</form>
```


<select size=>**

```
<form action=/cgi-bin/post-query method=POST>
<select name=fruits size=3>
  <option>Banana
  <option selected>Apple
  <option value=My_Favorite>Orange
  <option>Peach
</select><p>
<input type=submit><input type=reset>
</form>
```




<select size= multiple>**

Ctrl

(MS-WINDOWS File Manager)

```
<form action=/cgi-bin/post-query method=POST>
<select name=fruits size=3 multiple>
  <option selected>Banana
  <option selected>Apple
  <option value=My_Favorite>Orange
  <option selected>Peach
</select><p>
<input type=submit><input type=reset>
</form>
```





<textarea name=* rows> cols>**> ... <textarea>**

```
<form action=/cgi-bin/post-query method=POST>
<textarea name=comment rows=5 cols=60>
</textarea>
<P>
<input type=submit><input type=reset>
</form>
```



(Word Wrapping) *Netscape Only*

<textarea wrap=off> ... </textarea>

<textarea wrap=soft> ... </textarea>

“” MSWORD “”


```
<form action=/cgi-bin/post-query method=POST>
<textarea wrap=soft name=comment rows=5 cols=25> </textarea><P>
<input type=submit><input type=reset>
</form>
```

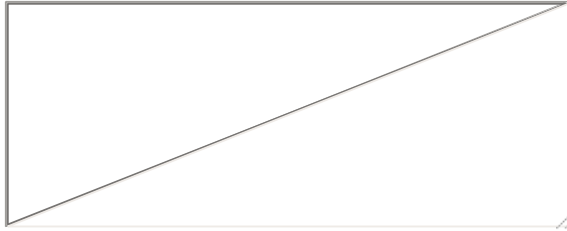

<textarea wrap=hard> ... </textarea>

“” MSWORD “”

```
<form action=/cgi-bin/post-query method=POST>
<textarea wrap=hard name=comment rows=5 cols=25> </textarea><P>
<input type=submit><input type=reset>
</form>
```

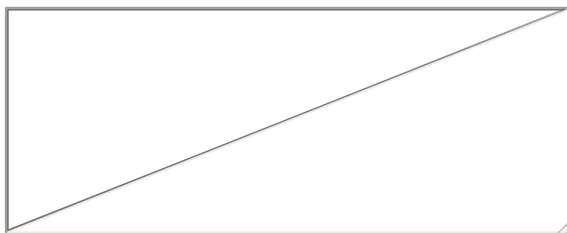[HTML Design Guide Main Page](#)

[Contents](#) || [Page](#) || [Font](#) || [Text Style](#) || [Image](#) || [Form](#) || [Table](#) || [Table Advanced](#)
|| [Frames](#) || [Marquee](#) || [Alternative Inline Elements](#)

[Tag Index](#) || [What's New](#)

Network Communication Design

<http://ncdesign.kyushu-id.ac.jp/>

C&P 1994-1996 Yuriko Ienaga v91102@vgenda.kyushu-id.ac.jp

(Frames)



<frameset> ... </frameset>
<frame src="url">
<noframes> ... </noframes>

<noframes> FRAMES

```
<HTML>  
<HEAD>  
</HEAD>  
<FRAMESET>  
    <FRAME SRC="url">  
    <NOFRAMES> ... </NOFRAMES>  
</FRAMESET>  
</HTML>
```



<frameset cols=#>

```
<frameset cols=30%,20%,50%>  
<frame src="A.html">  
<frame src="B.html">  
<frame src="C.html">  
</frameset>
```



A B C

<frameset rows=#>

```
<frameset rows=25%,25%,50%>  
<frame src="A.html">  
<frame src="B.html">  
<frame src="C.html">  
</frameset>
```



A

B

C

COLS & ROWS

```
<frameset cols=20%,*>
<frame src="A.html">
  <frameset rows=40%,*>
    <frame src="B.html">
    <frame src="C.html">
  </frameset>
</frameset>
```

B

A

C

<frame noresize>

● (Frame Target)

(Frame Name)

<frame name=#>

```
<frameset cols=50%,50%>  
<frame src="A.html">  
<frame src="B.html" name="HELLO">  
</frameset>
```

A B


4 ()

● Frame (Appearance)

<frame frameborder=#> #=yes, no / 1, 0

```
<frameset rows=30%, * >
<frame src="Acol.html" frameborder=1>
<frameset cols=30%, * >
    <frame src="Bcol.html" frameborder=0>
    <frame src="Ccol.html" frameborder=0>
</frameset>
</frameset>
```


(A BC)



<frameset framespacing=#> #=

IE Explorer Only


```
<frameset rows=30%, * framespacing=100>
<frame src="Acol.html">
<frameset cols=30%, * >
    <frame src="Bcol.html">
    <frame src="Ccol.html">
</frameset>
</frameset>
```



<frameset bordercolor=#> Netscape Only


#=rrggbb 16 RGB ,
Black, Olive, Teal, Red, Blue, Maroon, Navy, Gray, Lime,
Fuchsia, , Green, Purple, Silver, Yellow, Aqua

```
<frameset rows=30%,* bordercolor=red>
<frame src="Acol.html">
<frameset cols=30%,*>
  <frame src="Bcol.html">
  <frame src="Ccol.html">
</frameset>
</frameset>
```



(Margin) <frame marginwidth=# marginheight=#>

```
<frameset cols=50%,50%>
<frame src="A.html">
<frame src="A.html"
  marginwidth=50
  marginheight=50>
</frameset>
```



<frame scrolling=#> #=yes, no, auto

#= auto

● (Floating Frame) IE Explorer Only

`<iframe src=# name=##> ... </iframe>`

`# = URL`

`## = (Frame Name) ()`

`... = FRAMES`

```
<center>
<iframe src="A.html" name="window">
  Here is a Floating Frame
</iframe>
<br><br>
<a href="A.html" target="window">Load A</A><BR>
<a href="B.html" target="window">Load B</A><BR>
<a href="Ccol.html" target="window">Load C</A><BR>
</center>
```

Display
A.html

Load A
Load B
Load C



[HTML Design Guide Main Page](#)

[Contents](#) || [Page](#) || [Font](#) || [Text Style](#) || [Image](#) || [Form](#) || [Table](#) || [Table Advanced](#)
|| [Frames](#) || [Marquee](#) || [Alternative Inline Elements](#)

[Tag Index](#) || [What's New](#)

Network Communication Design

<http://ncdesign.kyushu-id.ac.jp/>

C&P 1994-1996 Yuriko Ienaga v91102@vgenda.kyushu-id.ac.jp

(Marquee)

!Explorer Only



<marquee> ... </marquee>

<marquee></marquee>



<direction=#> #=left, right

```
<marquee direction=left></marquee> <P>  
<marquee direction=right></marquee>
```

<behavior=#> #=scroll, slide, alternate

```
<marquee behavior=scroll></marquee> <P>  
<marquee behavior=slide></marquee> <P>  
<marquee behavior=alternate></marquee>
```

<loop=#> #=(infinite)

```
<marquee loop=3 width=50% behavior=scroll> 3 </marquee>  
<P>  
<marquee loop=3 width=50% behavior=slide> 3 </marquee>  
<P>  
<marquee loop=3 width=50% behavior=alternate> 3  
</marquee>
```

3

3

3

<scrollamount=#>

```
<marquee scrollamount=20></marquee>
```

```
<scrolldelay=#>
```

```
<marquee scrolldelay=500 scrollamount=100></marquee>
```

● (Layout)

(Align) <align=#> #=top, middle, bottom

```
<font size=6>  
<marquee align=# width=400></marquee>  
</font>
```

<bgcolor=#>

#=rrggbb 16

Black, Olive, Teal, Red, Blue, Maroon, Navy, Gray, Lime,
Fuchsia, , Green, Purple, Silver, Yellow, Aqua

```
<marquee bgcolor=aaaaee></marquee>
```

<height=# width=#>

```
<marquee height=40 width=50% bgcolor=aaeaaa>
```

</marquee>



(Margins)<hspace=# vspace=#>

```
*****<br>
'
<marquee hspace=20 vspace=20 width=150 bgcolor=ffaava
align=middle></marquee>
<br>
*****
```



,



[HTML Design Guide Main Page](#)

[Contents](#) || [Page](#) || [Font](#) || [Text Style](#) || [Image](#) || [Form](#) || [Table](#) || [Table Advanced](#)
|| [Frames](#) || [Marquee](#) || [Alternative Inline Elements](#)

[Tag Index](#) || [What's New](#)

Network Communication Design

<http://ncdesign.kyushu-id.ac.jp/>

C&P 1994-1996 Yuriko Ienaga v91102@vgenda.kyushu-id.ac.jp

(Alternative Inline Elements)

● (EMBED)

<embed src=#> #=URL

(movie), (sound), (vrmf)... ..

<embed> plugin

embed attributes are different between each plugins.



IE Explorer Only

<bgsound src=#> #=WAV URL

<bgsound loop=#> #=

`<bgsound src="sound.wav" loop=3>`




IE Explorer Only

url.avi AVI(Video for MSWINDOWS)

url.gif GIF

AVI AVI



AVI #=fileopen, mouseover

#=fileopen() AVI

mouseover AVI AVI


AVI AVI



MSWINDOWS AVI

```

```



```
<img loop=#>
```

```
<loop=infinite>
```

```

```



```
<img loopdelay=#> #=
```

```

```



[HTML Design Guide Main Page](#)

[Contents](#) || [Page](#) || [Font](#) || [Text Style](#) || [Image](#) || [Form](#) || [Table](#) || [Table Advanced](#)
|| [Frames](#) || [Marquee](#) || [Alternative Inline Elements](#)

[Tag Index](#) || [What's New](#)

Network Communication Design

<http://ncdesign.kyushu-id.ac.jp/>

C&P 1994-1996 Yuriho Ienaga v91102@vgenda.kyushu-id.ac.jp

Style Sheet Guide

[HTML2.0](#)

[HTML3.2](#)

[L](#)

[Floating Frame](#)

[](#)

[](#)

[<div align=left> ... </div>](#)

[<table bgcolor=#>](#)

[Table Group](#)

[<frame frameborder=#>](#)



[HTML Design Guide Main Page](#)

(Client Side Image Map)

●(Client Side Image Map)

“”


```
<img src=img.gif usemap="MAP-Name">
```

```
<map name="MAP-Name">
```

```
<area shape="#" coords="#" href="url">
```

```
</map>
```

```
#  
shape="rect" coords="A,A',B,B'"  
    (A,A')=Upper Left, (B,B')=Lower Right  
shape="circle" coords="A,A',R'"  
    (A,A')=Center, R=Radius  
shape="poly" coords="A,A',B,B',C,C'..."  
    (A,A')=First Corner, (B,B')=Second Corner, ...
```

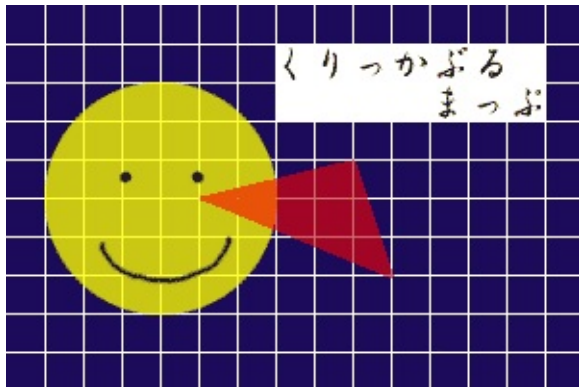

```

```

```
<map name="Face">
```

```
<!Text BOTTON>
```

```
<area shape="rect"  
    href="page.html"  
    coords="140,20,280,60">
```

```
<!Triangle BOTTON>
```

```
<area shape="poly"
```



```
href="image.html"
coords="100,100,180,80,200,140">
```

```
<!FACE>
  <area shape="circle"
        href="new.html"
        coords="80,100,60">
</map>
```

“”



[HTML Design Guide Main Page](#)

[Contents](#) || [Page](#) || [Font](#) || [Text Style](#) || [Image](#) || [Form](#) || [Table](#) || [Table Advanced](#)
|| [Frames](#) || [Marquee](#) || [Alternative Inline Elements](#)

[Tag Index](#) || [What's New](#)

Network Communication Design

<http://ncdesign.kyushu-id.ac.jp/>

C&P 1994-1996 Yuriko Ienaga v91102@vgenda.kyushu-id.ac.jp

(ENTITIES)

● HTML2.0

 ;
¡ ;
¢ ;
£ ;
¤ ;
¥ ;
¦ ;
§ ;
¨ ;
© ;
ª ;
« ;
¬ ;
­ ;
® ;
¯ ;
° ;
± ;
² ;
³ ;
´ ;
µ ;
¶ ;
· ;
¸ ;
¹ ;
º ;
» ;
¼ ;
½ ;
¿ ;

● HTML3.2 IE Explorer Only

™

™

● ISO

Following entities for ISO 8859 Latin-1 ignore when using other character sets. Anyway, you can specify charset of html source with [meta](#) tag.

Æ

Á

Â

À

Å

Ã

Ä

Ç

Ð

É

Ê

È

Ë

Í

Î

Ì

Ï

Ñ

Ó

Ô

Ò

Ø

Õ

Ö

Þ

Ú

Û

Ù

Ü

Ý

á

â

æ

à

å

ã

ä

ç

é

ê

è

ð

ë

í

î

ì

ï

ñ

ó

ô

ò

ø

õ

ö

ß

þ

ú

û

ù

ü

ý

ÿ

¡

¢

£

¥

¦

§

¨

©

ª

«

¬

­

®

¯

°

±

²

³

´

µ

¶

·

¸

¹

º

»

¼

½

¾

¿

×

Þ

÷

“(Entities)”

Network Communication Design

<http://ncdesign.kyushu-id.ac.jp/>

C&P 1994-1996 Yuri Ienaga v91102@vgenda.kyushu-id.ac.jp

Back "(Link)"

?

“”

“ ”

“ 0 ”

(Font Face)

Arial...

Arial --- ABCdef123

Comic Sans MS...

Comic Sans MS --- ABCdef123

Courier...

Courier --- ABCdef123

Courier New...

Courier New --- ABCdef123

Modern...

Modern --- ABCdef123

MS Sans Serif...

MS Sans Serif --- ABCdef123

MS Serif...

MS Serif --- ABCdef123

MS-DOS CP 932...

MS-DOS CP 932 --- ABCdef123

Roman...

Roman --- ABCdef123

Script...

Script --- ABCdef123

Small Fonts...

Small Fonts --- ABCdef123

Symbol...

Symbol --- ABCdef123

Times Roman...

Times Roman --- ABCdef123

Times New Roman...

Times New Roman --- ABCdef123

WingDings...

WingDings --- ABCdef123

<multicol cols=2>

What is our Aim?

Transmitting the information can be said as communication between sender and clients. How can we design better communication through the networks?

Now we have many methods such as Web, E-mail, Realtime video and more to communicate on the Internet. It is quite different from ordinary media, and there should be new designing rules. To find them, we provide the tips to put up the information to the net, make research into communication design, and have mailing list as discussion space.

Aspects of Design

The word "design" has some aspects. One aspect is surface design such as layout, coloring, video editing etc. Another is systematic design such as data base, transfer sytem, link structure, etc. We need to think about those aspects together as "design" to make better communication on the net.

Better Browsingwe try to create NCD pages included available functions: HTML2.0 (basic tags), Netscape and Internet Explorer Extensions, but we always care that these pages can be browsed by any kind of browsers. Now, there is no browser supports all kinds of functions. So it is better to use some different browsers, and take a look their different appearance.

[</multicol>](#)

<multicol cols=2 gutter=100>

What is our Aim?

Transmitting the information can be said as communication between sender and clients. How can we design better communication through the networks?

Now we have many methods such as Web, E-mail, Realtime video and more to communicate on the Internet. It is quite different from ordinary media, and there should be new designing rules. To find them, we provide the tips to put up the information to the net, make research into communication design, and have mailing list as discussion space.

Aspects of Design

The word "design" has some aspects. One aspect is surface design such as layout, coloring, video editing etc. Another is systematic design such as data base, transfer sytem, link structure, etc. We need to think about those aspects together as "design" to make better communication on the net.

Better Browsingwe try to create NCD pages included available functions: HTML2.0 (basic tags), Netscape and Internet Explorer Extensions, but we always care that these pages can be browsed by any kind of browsers. Now, there is no browser supports all kinds of functions. So it is better to use some different browsers, and take a look their different appearance.

[**</multicol>**](#)

<multicol cols=2 width=400>

What is our Aim?

Transmitting the information can be said as communication between sender and clients. How can we design better communication through the networks?

Now we have many methods such as Web, E-mail, Realtime video and more to communicate on the Internet. It is quite different from ordinary media, and there should be new designing rules. To find them, we provide the tips to put up the information to the net, make research into communication design, and have mailing list as discussion space.

Aspects of Design

The word "design" has some aspects. One aspect is surface design such as layout, coloring, video editing etc. Another is systematic design such as data base, transfer sytem, link structure, etc. We need to think about those aspects together as "design" to make better communication on the net.

Better Browsingwe try to create NCD pages included available functions: HTML2.0 (basic tags), Netscape and Internet Explorer Extensions, but we always care that these pages can be browsed by any kind of browsers. Now, there is no browser supports all kinds of functions. So it is better to use some different browsers, and take a look their different appearance.

[**</multicol>**](#)

A

```
<a href="C.html" target="HELLO">
```

```
C B
```

```
</a>
```

```
<a href="C.html">
```

```
C A
```

```
</a>
```

B


"HELLO"

- ``
`... 3 frames` ``
- ``
`... 3 frames` ``
- ``
`3 frames (FRAMESET)... A` ``
- ``
`... A` ``

A

A

A

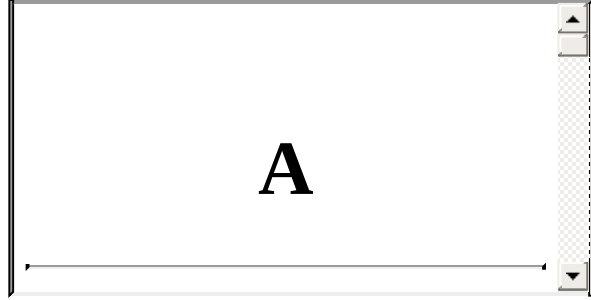

A

A

B

C

???

IE Explorer Only

B

C